

# **IGNITION APPLICATION DATA**

**CONTINENTAL<sup>®</sup> IGNITION SYSTEMS**

# **SERVICE SUPPORT MANUAL**



**Publication X44001-3**

©2011 CONTINENTAL MOTORS, INC.

**AUG 2011**



*Intentionally Left Blank*

# Introduction

This document supersedes publication X44001-1. The application data is consolidated in this document for ease of cross referencing engines to TCM Ignition Systems, TCM Magnetos and Gold Seal Harnesses. Due to the variety of applications for many engines, some changes or re-routing of leads may be necessary. This document is to be used for reference only. Final application authority rests with the engine manufacturer and/or the FAA.

## How to Use This Book

### A. ENGINE APPLICATIONS


This Application Data is organized so that all options of Magnetos and Harnesses for a given engine appear on one page. The listing is sorted by engine horsepower/displacement number, and then alphabetically by engine prefix and suffix. In cases where all options for a class of engine are identical, engine designator suffices are listed on the same row separated by commas. Otherwise, each horizontal row represents one option for the engine specified.

### B. IGNITION SYSTEMS

Ignition System Kits, consisting of two magnetos and a harness or a dual magneto preassembled to its harness, are specified by part number in the first column following the engine designation. Each kit includes magnetos listed in the same row and the corresponding Gold Seal Harness, enough to supply a complete engine.

### C. MAGNETOS

1. Magneto type numbers contain information regarding design configuration. Magneto type numbers may be read as follows:

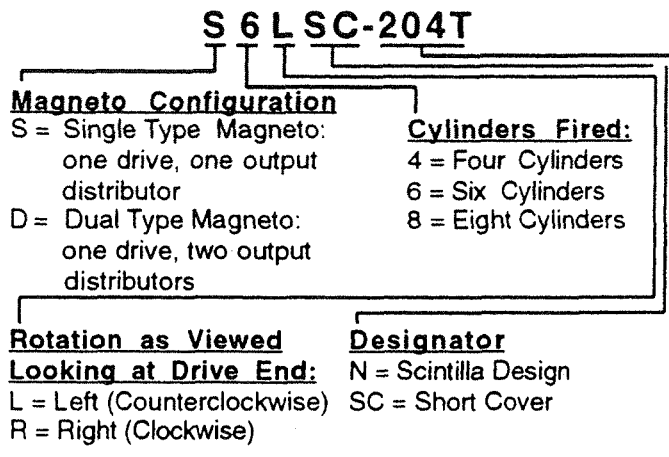

#### MODEL NUMBER:

#### S-20, S-200 Series

- 21: Dog-Ear Mount, Impulse Coupled
  - 25: Deep Flange Mount, Impulse Coupled
  - 200: Dog-Eared Mount, With Retard Breaker
  - 201: Deep Flange Mount, With Retard Breaker
  - 204: Dog-Eared Mount, Without Retard Breaker
  - 205: Deep Flange Mount, Without Retard Breaker
- Suffix Letters : P - Pressurized  
T - Tachometer Breakers Included

#### S-1200 Series

- 1201: Deep Flange Mount, With Retard Breaker
- 1205: Deep Flange Mount, Without Retard Breaker
- 1208: Short Flange Mount, With Retard Breaker
- 1209: Short Flange Mount, Without Retard Breaker
- 1225: Deep Flange Mount, With Impulse Coupling
- 1227: Short Flange Mount, With Impulse Coupling
- 1251: Pressurized Version of 1201
- 1255: Pressurized Version of 1205
- 1258: Pressurized Version of 1208
- 1259: Pressurized Version of 1209

#### D-3000 Series

- 3000: Impulse Coupled
- 3200: With Retard Breaker

2. Magneto or Ignition System Kit Part Number: When ordering, specify magneto by part number. Also specify:
  - Red Label Magnetos - Factory New  
-or-
  - Blue Label Magnetos-Factory Rebuilt By Teledyne Continental Motors, Atlanta Manufacturing Plant
 Both new and factory rebuilt magnetos carry the same warranty.
3. Except as noted, the magnetos listed are F.A.A. approved for each engine. Other types of Magnetos may be used, upon compliance with all pertinent F.A.A. regulations.
4. For installation, maintenance and parts information refer to TCM Ignition Master Manual, Form X40000.
5. D-2000 Series Magnetos have been superseded by D-3000 Series Magnetos. Determine part number supersedure by changing 10-382XXX-XX Series Magnetos to 10-682XXX-XX Series Magnetos.
4. TCM Ignition Systems now offers Harnesses for use with Slick 4000, 4100, 4200, 4300, 6000, 6100 , 6200 and 6300 Series Magnetos. "Gold Seal SK" Harnesses are available for all applications where Type 4300 and 6300 Series Magnetos are referenced in the Application Chart. All Gold Seal SK Harnesses use resilient silicone grommets at the Magneto Cap for maximum altitude performance. All 6 cylinder Gold Seal SK Harnesses are supplied with sealing o-ring installed and may be used with either pressurized or un-pressurized Magnetos.
5. **Spare Leads:** Gold Seal Spare Leads are available for repair of Gold Seal and Dura-Blue Harnesses. Leads are dressed at the spark plug end, and hardware for attachment to Dura-Blue, Gold Seal and Gold Seal SK Magneto outlet plates is provided in kit form.

**SPARE LEADS**

| 5/8-24                | 3/4-20                |
|-----------------------|-----------------------|
| 10-400402-48(48 inch) | 10-400401-48(48 inch) |
| 10-400402-72(72 inch) | 10-400401-72(78 Inch) |

**6. Harness Outlet Plates, Covers and Caps:**

**D. GOLD SEAL HARNESSSES**

1. TCM Gold Seal Ignition Harnesses & Leads incorporate the following Quality Features:
  - Tightly woven copper braid to insure minimum radio interference radiation.
  - Improved silicone scuff resistant coating. Retains flexibility at -65°F and will withstand +400°F.
  - Completely repairable, all components supplied as spares.
  - TCM offers the most complete line of light weight radio shielded Harnesses and Leads for all applications.
2. For many engines, either spark plug size (5/8-24 or 3/4 -20 - nut thread size) may be used. Where harness options are available, both harness part numbers are listed.
3. P/N 10-821XXX-X and 10-823XXX-X Harnesses are fully assembled at magneto and spark plug ends, and are supplied with clamps, ties and attaching hardware as bag parts. Each Harness part number listed includes an entire harness for one engine.

| Magneto Series         | Gold Seal P/N (1 ea) |
|------------------------|----------------------|
| S4-20, S4-200          | 10-400114            |
| S6-20, S6-200          | 10-400116            |
| S4-1200                | 10-400104            |
| S6-1200                | 10-400196            |
| S6-1250 (Pressurized)  | 10-400196P           |
| S8-1200                | 10-400108            |
| S8-1250 (Pressurized)  | 10-400108P           |
| D4-3000 ,Plain         | 10-400124-1          |
| D4-3000, w/Retard      | 10-400124-2          |
| D4-3000, w/Tach        | 10-400124-4          |
| D6-3000, Plain         | 10-400126-1          |
| D6-3000, w/Retard      | 10-400126-2          |
| D6-3000, Tach & Retard | 10-400126-3          |
| D6-3000,w/Tach         | 10-400126-4          |
| D8-3000 w/Retard       | 10-400128-2          |
| 4200,4300 (Slick)      | 10-400134            |
| 6200,6300 (Slick)      | 10-400136            |

### 7. Universal Harness Kits

- Each kit contains two leads for each cylinder.
- Leads are dressed at the spark plug end.
- Outlet plate purchased separately.
- Hardware for attachment to Dura-Blue, Gold Seal and Gold Seal SK Magneto Outlet Plates is provided.

| Number of Cylinders | Spark Plug | Universal Kit P/N |
|---------------------|------------|-------------------|
| 6                   | 3/4-20     | 10-400416         |
| 6                   | 5/8-24     | 10-400426         |
| 4                   | 3/4-20     | 10-400414         |
| 4                   | 5/8-24     | 10-400424         |

### 8. Bend Clamp Kits

TCM's Gold Seal Adjustable Bend Clamp Kits are designed to replace bulky, expensive elbows on installations where positive lead location near the spark plug terminal is required. Bend clamp kits may be used on any TCM Gold Seal Harness, 5/8-24 or 3/4-20 terminals, as well as with Dura-Blue 5/8-24 terminals. Angles of 70°, 90°, or 110° may be selected.

#### Bend Clamp

| Kit P/N      | Description                   |
|--------------|-------------------------------|
| 10-400112-8  | 8 Assy's for 4 CYL Harnesses  |
| 10-400112-12 | 12 Assy's for 6 CYL Harnesses |

### E. STARTING VIBRATORS

When right magneto (not boosted in most applications) is not grounded by Ignition or Starting Switch, use Starting Vibrators with relay. Five electrical terminals are used on Vibrators with relay, two terminals are used on vibrators without relay. Consult Airframe Parts Catalog for Ignition Switch and Starting Vibrator application.

| Vibrator Part Number | Description   | Used With Ignition Sys. |
|----------------------|---------------|-------------------------|
| 10-176487-121        | 12VDC         | S-200                   |
| 10-357487-241        | 24VDC         | S-200                   |
| 10-176487-122        | 12VDC         | S-1200                  |
| 10-357487-242        | 24VDC         | S-1200                  |
| 10-382775-12         | 12VDC         | D-3200                  |
| 10-382808-24         | 24VDC         | D-3200                  |
| 10-176485-121        | 12VDC w/Relay | S-200                   |
| 10-176485-241        | 24VDC w/Relay | S-200                   |
| 10-176485-122        | 12VDC w/Relay | S-1200                  |
| 10-176485-242        | 24VDC w/Relay | S-1200                  |
| 10-382780-12         | 12VDC w/Relay | D-3200                  |
| 10-382780-24         | 24VDC w/Relay | D-3200                  |

### F. IGNITION AND STARTING SWITCHES

| Switch P/N  | Operator | Functions                  |
|-------------|----------|----------------------------|
| 10-357200-1 | Key      | Off-R-L-Both-Start (Twist) |
| 10-357210-1 | Key      | Off-R-L-Both-Start (Push)  |
| 10-357230-1 | Lever    | Off-R-L-Both-Start (Twist) |
| 10-357240-1 | Lever    | Off-R-L-Both-Start (Push)  |
| 10-357290-1 | Key      | Off-R-L-Both               |
| 10-400185-1 | Lever    | Off-R-L-Both               |

### G. SC SERIES MAGNETOS

1. The new TCM SC (short cover) Series Magnetos will be supplied on a use stock basis for factory new and factory rebuilt magnetos in place of the S-20 and S-200 magnetos previously supplied. The new SC Series magnetos have the following features:
  - Feed thru capacitor on all specifications of S-20 and S-200 Series Magnetos.
  - Capacitor interchangeable with S-1200 Series.
  - Simplified stud-type switch and retard connections - no special kits necessary.
  - Low profile short cover (SC) allows maximum installation flexibility.
  - Consolidated parts usage.
2. Short Cover (SC) magnetos are fully interchangeable with S-20 and S-200 magnetos previously supplied. Pairing an SC magneto with one of the old type magnetos on an engine installation is permissible. All SC magnetos listed are FAA-PMA approved. Also note that engines with a single impulse coupled magneto (example: Type S4LSC-21, Part No. 10-500514-1) are typically used in conjunction with an S-200 series "straight Drive" magneto (example: type S4LSC-204, part No. 10-600644-1)
3. As many of the older style S-20 and S-200 series magnetos may remain in service for many years, the following cross reference charts are given for your convenience.

## H. NOTES:

These notes are used throughout the following tables:

1. Retrofits competitive ignition. Obtain FAA approval.
2. Model series given for reference purposes only. Consult engine manufacturer's parts list for correct magneto part number. Harnesses for 4300 Series Magnetos may also be used with 4000, 4100 and 4200 Series Magnetos. Harnesses for 6300 Series Magnetos may also be used with 6000, 6100 and 6200 Series Magnetos.
3. Magneto includes tachometer breaker. If magneto tachometer source is not used, other magneto options may be considered.
4. Refer to O-235-C1. Retrofits competitive ignition. Obtain FAA approval.
5. Refer to O-235-C2A. Retrofits competitive ignition. Obtain FAA approval.
6. Refer to O-235-K2A. Retrofits competitive ignition. Obtain FAA approval.
7. Refer to O-235-L2A with geared starter. Obtain FAA approval.
8. Refer to O-235-N2A. Retrofits competitive ignition. Obtain FAA approval.
9. Refer to IO-320-E1A. Retrofits competitive ignition. Obtain FAA approval.
10. Refer to O-320-D2A. Retrofits competitive ignition. Obtain FAA approval.
11. Refer to O-320-E1F. Retrofits competitive ignition. Obtain FAA approval.
12. Refer to O-320-E3H. Retrofits competitive ignition. Obtain FAA approval.
13. Refer to AEIO-360-B1F6. Retrofits competitive ignition. Obtain FAA approval.
14. Refer to O-360-A4J. - Comply with latest revision of Lycoming Service Bulletin 411. Retrofits competitive ignition. Obtain FAA approval.
15. Refer to O-360-A4A. Retrofits competitive ignition. Obtain FAA approval.
16. Refer to O-360-C1A. Retrofits competitive ignition. Obtain FAA approval.
17. Refer to O-360-C2A. Retrofits competitive ignition. Obtain FAA approval.
18. Retrofits S-50 Series Ignition. Obtain FAA approval.
19. Refer to GO-480-F1A6. Retrofits S-50 Series Magnetos. Obtain FAA approval.
20. Retrofits S-600 Series Low Tension Ignition. Also requires retrofit of starting vibrator. See Introduction for options. Obtain FAA approval.
21. Refer to IGO-540-A1A. Retrofits S-600 Series Low Tension Ignition. Also requires retrofit of starting vibrator. See Introduction for options. Obtain FAA approval.
22. Refer to IGO-540-B1A. Retrofits S-600 Series Low Tension Ignition. Also requires retrofit of starting vibrator. See Introduction for options. Obtain FAA approval.
23. Refer to IGSO-540-A1D. Retrofits S-600 Series Low Tension Ignition. Also requires retrofit of starting vibrator. See Introduction for options. Obtain FAA approval.
24. Refer to IGSO-540-B1C. Retrofits S-600 Series Low Tension Ignition. Also requires retrofit of starting vibrator. See Introduction for options. Obtain FAA approval.
25. Harness part numbers to be announced. Harnesses may be constructed using Universal Harness Kits and outlet plates.
26. Refer to IO-720-A1B. Retrofits S-700 Series Ignition. Also requires retrofit of starting vibrator. See Introduction for options. See latest revision of Lycoming Service Instruction 1252 for additional information. Obtain FAA approval.
27. Refer to IO-720-B1B. Retrofits S-700 Series Ignition. Also requires retrofit of starting vibrator. See Introduction for options. See latest revision of Lycoming Service Instruction 1252 for additional information. Obtain FAA approval.

## NOTES (CONTINUED)

28. Retrofits SF Series Ignition or non-impulse coupled S-20 Ignition. Obtain FAA approval.
29. Pressurized S-1200 Series - Use 2 each P/N 10-391391 Mag-to-Harness gaskets per engine.
30. **A.** Retrofits S4LN-1211 and S4LN-1210 ignition. Refer to latest revision of Lycoming Service Instruction 1346A for additional information.  
**B.** Harness P/N 10-822482-2 supplied with clamps and ties dressed onto harness.
31. Pressurized S-20 Series - Use 2 each P/N 10-357520 Mag-to-Harness gaskets per engine.
32. **A.** If retrofitting to S-20 series ignition, no new tachometer sensor necessary. B&D sensor P/N 0406-002 or 0406-003 fits P/N 10-500556-901 Magneto. Use pointed tool to remove screen and cotton filter prior to installation.  
**B.** Two each P/N 10-500556-101 magnetos may be installed. Use B&D sensor P/N 0406-004 in place of bleed air orifice on left magneto.
33. **A.** Use tach sensor B&D P/N 0406-004 with TCM S-20 Magnetos. Sensor available from B&D Instruments, Inc., 209 W. Main, Valley Center, KS 67147.  
**B.** Installation instructions for S-20 Magnetos on engines using P/N 649283 Alternator to be announced.
34. STC for conversion to pressurized magnetos for these installation held by RAM Aircraft Conversions, P.O. Box 5219, Waco, TX 76708.
35. For Aero Service, GROB, Aero Engines and Socata Airframes.
36. For Cessna 177 Cardinal and Mooney M20J through model year 1983.
37. For Mooney M20J, 201, MSE, model year 1984 and up.
38. Use other options for Piper Cherokee, PA-28 200R ARROW II.
39. For use on engines with each magneto drive made up of TCM P/N 531178 retainer and 2 ea. 531179 Bushings per TCM "E" Series Service Parts Catalog, Form X30017
40. For use on engines with each magneto drive made up by TCM P/N 520121 Disc and 352042 Gear.
41. For use on Washac Industries aircraft.
42. For use on Cessna 177 Cardinal, SPAD, Schweizer, and Con Air airframes.
43. For use on Beechcraft model 24 "Sierra 200".
44. Engine normally supplied with one impulse coupled magneto, but may be equipped with two impulse coupled magnetos as shown here.
45. Includes all F, J, H, B, and P suffix variants.



**SUPERSEDURE OF TCM (BENDIX) S-20  
AND S-200 SERIES MAGNETOS  
OLD P/N TO NEW CROSS REFERENCE**

| <u>Old Style<br/>Magneto<br/>P/N</u> | <u>Old Style<br/>Type<br/>Number</u> | <u>Replaced<br/>By SC<br/>Magneto<br/>P/N</u> | <u>New SC<br/>Type<br/>Number</u> | <u>Old Style<br/>Magneto<br/>P/N</u> | <u>Old Style<br/>Type<br/>Number</u> | <u>Replaced<br/>By SC<br/>Magneto<br/>P/N</u> | <u>New SC<br/>Type<br/>Number</u> |
|--------------------------------------|--------------------------------------|---|-----------------------------------|--------------------------------------|--------------------------------------|---|-----------------------------------|
| 10-51360-25                          | S4LN-21                              | 10-500514-1                                   | S4LSC-21                          |                                      |                                      |   |                                   |
| 10-51360-26                          | S4LN-21                              | 10-500514-1                                   | S4LSC-21                          | 10-79020-18                          | S6LN-25                              | 10-500556-3                                   | S6LSC-25                          |
| 10-51360-27                          | S4RN-20                              | 10-600644-3                                   | S4RSC-204                         | 10-79020-19                          | S6RN-25                              | 10-500556-1                                   | S6RSC-25                          |
|                                      |                                      |   |                                   | 10-79020-118                         | S6LN-25P                             | 10-500556-103                                 | S6LSC-25P                         |
| 10-51360-28                          | S4RN-21                              | 10-500514-3                                   | S4RSC-21                          |                                      |                                      |   |                                   |
| 10-51360-29                          | S4LN-20                              | 10-600644-1                                   | S4LSC-204                         | 10-79020-119                         | S6RN-25P                             | 10-500556-101                                 | S6RSC-25P                         |
| 10-51360-37                          | S4LN-21                              | 10-500514-1                                   | S4LSC-21                          | 10-163005-2                          | S4LN-200                             | 10-600614-1                                   | S4LSC-200                         |
|                                      |                                      |   |                                   | 10-163005-3                          | S4LN-200                             | 10-600614-3                                   | S4LSC-200                         |
| 10-51360-40                          | S4RN-20                              | 10-600644-5                                   | S4RSC-204                         |                                      |                                      |   |                                   |
| 10-51360-41                          | S4RN-21                              | 10-500514-5                                   | S4RSC-21                          | 10-163005-11                         | S4LN-200                             | 10-600614-2                                   | S4LSC-200                         |
| 10-51360-45                          | S4LN-21                              | 10-500514-1                                   | S4LSC-21                          | 10-163010-1                          | S6RN-200                             | 10-600616-4                                   | S6RSC-200                         |
|                                      |                                      |   |                                   | 10-163010-2                          | S6LN-200                             | 10-600616-5                                   | S6LSC-200                         |
| 10-51360-46                          | S4RN-21                              | 10-500514-4                                   | S4RSC-21                          |                                      |                                      |   |                                   |
| 10-51360-47                          | S4LN-21                              | 10-500514-201                                 | S4LSC-21T                         | 10-163010-10                         | S6LN-200                             | 10-600616-3                                   | S6LSC-200                         |
| 10-51360-54                          | S4LN-21                              | 10-500514-2                                   | S4LSC-21                          | 10-163010-11                         | S6LN-200                             | 10-600616-6                                   | S6LSC-200                         |
|                                      |                                      |   |                                   | 10-163010-15                         | S6RN-200                             | 10-600616-7                                   | S6RSC-200                         |
| 10-51360-55                          | S4LN-21                              | 10-500514-2                                   | S4LSC-21                          |                                      |                                      |   |                                   |
| 10-51360-58                          | S4LN-21                              | 10-500514-2                                   | S4LSC-21                          | 10-163015-3                          | S4RN-201                             | 10-600604-1                                   | S4RSC-201                         |
| 10-51365-9                           | S6LN-21                              | 10-500516-10                                  | S6LSC-21                          | 10-163020-3                          | S6RN-201                             | 10-600606-1                                   | S6RSC-201                         |
|                                      |                                      |   |                                   | 10-163020-4                          | S6LN-201                             | 10-600606-3                                   | S6LSC-201                         |
| 10-51365-32                          | S6LN-21                              | 10-500516-3                                   | S6LSC-21                          |                                      |                                      |   |                                   |
| 10-51365-33                          | S6LN-20                              | 10-600646-2                                   | S6LSC-204                         | 10-163045-1                          | S4LN-204                             | 10-600644-4                                   | S4LSC-204                         |
| 10-51365-34                          | S6RN-21                              | 10-500516-5                                   | S6RSC-21                          | 10-163045-3                          | S4LN-204                             | 10-600644-1                                   | S4LSC-204                         |
|                                      |                                      |   |                                   | 10-163045-6                          | S4LN-204                             | 10-600644-201                                 | S4LSC-204T                        |
| 10-51365-35                          | S6RN-21                              | 10-500516-6                                   | S6RSC-21                          |                                      |                                      |   |                                   |
| 10-51365-39                          | S6LN-20                              | 10-500516-4                                   | S6LSC-21                          | 10-163050-1                          | S6LN-204                             | 10-600646-2                                   | S6LSC-204                         |
| 10-51365-40                          | S6RN-21                              | 10-500516-7                                   | S6RSC-21                          | 10-163050-2                          | S6LN-204                             | 10-600646-3                                   | S6LSC-204                         |
|                                      |                                      |   |                                   | 10-163050-7                          | S6RN-204                             | 10-600646-4                                   | S6RSC-204                         |
| 10-51365-43                          | S6LN-21                              | 10-500516-3                                   | S6LSC-21                          |                                      |                                      |   |                                   |
| 10-51365-46                          | S6LN-20                              | 10-600646-1                                   | S6LSC-204                         | 10-163050-9                          | S6LN-204                             | 10-600646-1                                   | S6LSC-204                         |
| 10-51365-47                          | S6LN-21                              | 10-500516-2                                   | S6LSC-21                          | 10-163050-12                         | S6LN-204                             | 10-600646-201                                 | S6LSC-204T                        |
|                                      |                                      |   |                                   | 10-163055-1                          | S4RN-205                             | 10-600654-1                                   | S4RSC-205                         |
| 10-51365-48                          | S6RN-21                              | 10-500516-9                                   | S6RSC-21                          |                                      |                                      |   |                                   |
| 10-51365-54                          | S6RN-21                              | 10-500516-7                                   | S6RSC-21                          | 10-163060-1                          | S6RN-205                             | 10-600656-1                                   | S6RSC-205                         |
| 10-51365-57                          | S6LN-21                              | 10-500516-2                                   | S6LSC-21                          | 10-163060-2                          | S6LN-205                             | 10-600656-3                                   | S6LSC-205                         |
|                                      |                                      |   |                                   |                                      |                                      |   |                                   |
| 10-52350-19                          | S6RN-23                              | 10-500516-9                                   | S6RSC-21                          |                                      |                                      |   |                                   |
| 10-52350-20                          | S6LN-23                              | 10-500516-3                                   | S6LSC-21                          |                                      |                                      |   |                                   |
| 10-52350-22                          | S6LN-22                              | 10-600646-2                                   | S6LSC-204                         |                                      |                                      |   |                                   |
|                                      |                                      |   |                                   |                                      |                                      |   |                                   |
| 10-52350-23                          | S6RN-23                              | 10-500516-5                                   | S6RSC-21                          |                                      |                                      |   |                                   |
| 10-79020-6                           | S6LN-25                              | 10-500556-3                                   | S6LSC-25                          |                                      |                                      |   |                                   |
| 10-79020-10                          | S6RN-25                              | 10-500556-1                                   | S6RSC-25                          |                                      |                                      |   |                                   |
|                                      |                                      |   |                                   |                                      |                                      |   |                                   |
| 10-79020-11                          | S6LN-25                              | 10-500556-203                                 | S6LSC-25T                         |                                      |                                      |   |                                   |
| 10-79020-16                          | S6LN-25                              | 10-500556-3                                   | S6LSC-25                          |                                      |                                      |   |                                   |
| 10-79020-17                          | S6LN-25                              | 10-500556-203                                 | S6LSC-25T                         |                                      |                                      |   |                                   |

**SUPERSEDURE OF TCM (BENDIX) S-20  
AND S-200 SERIES MAGNETOS:  
NEW P/N TO OLD P/N CROSS REFERENCE**

| <u>NEW<br/>SC PART<br/>NUMBER</u> | <u>NEW<br/>TYPE<br/>NUMBER</u> | <u>REPLACES<br/>OLD P/N</u>                                 | <u>OLD<br/>TYPE<br/>NUMBER</u>              | <u>NEW<br/>SC PART<br/>NUMBER</u>             | <u>NEW<br/>TYPE<br/>NUMBER</u>       | <u>REPLACES<br/>OLD P/N</u>  | <u>OLD<br/>TYPE<br/>NUMBER</u>                          |
|-----------------------------------|--------------------------------|---|---|---|--------------------------------------|--|---|
| 10-500514-1                       | S4LSC-21                       | 10-51360-25,<br>10-51360-26,<br>10-51360-37,<br>10-51360-45 | S4LN-21,<br>S4LN-21,<br>S4LN-21,<br>S4LN-21 | 10-600616-5<br>10-600616-6<br>10-600616-7     | S6LSC-200<br>S6LSC-200<br>S6RSC-200  | 10-163010-2<br>10-163010-11<br>10-163010-15                                  | S6LN-200<br>S6LN-200<br>S6RN-200                        |
| 10-500514-2                       | S4LSC-21                       | 10-51360-54,<br>10-51360-55,<br>10-51360-58                 | S4LN-21,<br>S4LN-21,<br>S4LN-21             | 10-600644-1<br>10-600644-3<br>10-600644-4     | S4LSC-204<br>S4RSC-204<br>S4LSC-204  | 10-51360-29,<br>10-163045-3,<br>10-51360-27,<br>10-163045-1                  | S4LN-20,<br>S4LN-204<br>S4RN-20<br>S4LN-204             |
| 10-500514-3                       | S4RSC-21                       | 10-51360-28   | S4RN-21                                     | 10-600644-5<br>10-600644-201<br>10-600646-1   | S4RSC-204<br>S4LSC-204T<br>S6LSC-204 | 10-51360-40<br>10-163045-6<br>10-51360-46,<br>10-163050-9                    | S4RN-20<br>S4LN-204<br>S6LN-20,<br>S6LN-204             |
| 10-500514-4                       | S4RSC-21                       | 10-51360-46   | S4RN-21                                     | 10-600646-2                                   | S6LSC-204                            | 10-51360-33<br>10-52350-22<br>10-163050-1                                    | S6LN-20<br>S6LN-22<br>S6LN-204                          |
| 10-500514-5                       | S4RSC-21                       | 10-51360-41   | S4RN-21                                     | 10-600646-3<br>10-600646-4                    | S6LSC-204<br>S6RSC-204               | 10-163050-2<br>10-163050-7   | S6LN-204<br>S6RN-204                                    |
| 10-500514-201                     | S4LSC-21T                      | 10-51365-47   | S4LN-21                                     | 10-600646-201<br>10-600654-1<br>10-600656-1   | S6LSC-204T<br>S4RSC-205<br>S6RSC-205 | 10-163050-12<br>10-163055-1<br>10-163060-1                                   | S6LN-204<br>S4RN-205<br>S6RN-205                        |
| 10-500516-2                       | S6LSC-2                        | 10-51365-47,<br>10-51365-57                                 | S6LN-21,<br>S6LN-21                         | 10-600656-3                                   | S6LSC-205                            | 10-163060-2  | S6LN-205  |
| 10-500516-3                       | S6LSC-21                       | 10-51365-32,<br>10-51365-43,<br>10-52350-20                 | S6LN-21,<br>S6LN-21,<br>S6LN-23             | 10-500516-9<br>10-500516-10<br>10-500556-1    | S6RSC-21<br>S6LSC-21<br>S6RSC-25     | 10-51365-48,<br>10-52350-19,<br>10-51365-9,<br>10-79020-10,<br>10-79020-19   | S6RN-21,<br>S6RN-23<br>S6LN-21<br>S6RN-25,<br>S6RN-25   |
| 10-500516-4                       | S6LSC-21                       | 10-51365-39   | S6LN-21                                     | 10-500556-3<br>10-500556-101<br>10-500556-103 | S6LSC-25<br>S6RSC-25P<br>S6LSC-25P   | 10-79020-6,<br>10-79020-16,<br>10-79020-18,<br>10-79020-119,<br>10-79020-118 | S6LN-25,<br>S6LN-25,<br>S6LN-25<br>S6RN-25P<br>S6LN-25P |
| 10-500516-5                       | S6RSC-21                       | 10-51365-34,<br>10-52350-23                                 | S6RN-21,<br>S6RN-23                         | 10-500556-203<br>10-600604-1<br>10-600606-1   | S6LSC-25T<br>S4RSC-201<br>S6RSC-201  | 10-79020-11,<br>10-79020-17,<br>10-163015-3,<br>10-163020-3                  | S6LN-25,<br>S6LN-25<br>S4RN-201<br>S6RN-201             |
| 10-500516-6                       | S6RSC-21                       | 10-51365-35   | S6RN-21                                     | 10-600606-3<br>10-600614-1<br>10-600614-2     | S6LSC-201<br>S4LSC-201<br>S4LSC-200  | 10-163020-4,<br>10-163005-2,<br>10-163005-11                                 | S6LN-201<br>S4LN-200<br>S4LN-200                        |
| 10-500516-7                       | S6RSC-21                       | 10-51365-40,<br>10-51365-54                                 | S6RN-21,<br>S6RN-21                         | 10-600614-3<br>10-600616-3<br>10-600616-4     | S4LSC-200<br>S6LSC-200<br>S6RSC-200  | 10-163005-3,<br>10-163010-10,<br>10-163010-1                                 | S4LN-200<br>S6LN-200<br>S6RN-200                        |
| 10-500516-9                       | S6RSC-21                       | 10-51365-48,<br>10-52350-19                                 | S6RN-21,<br>S6RN-23                         |   |                                      |  |   |
| 10-500516-10                      | S6LSC-21                       | 10-51365-9  | S6LN-21                                     |   |                                      |  |   |
| 10-500556-1                       | S6RSC-25                       | 10-79020-10,<br>10-79020-19                                 | S6RN-25,<br>S6RN-25                         |   |                                      |  |   |
| 10-500556-3                       | S6LSC-25                       | 10-79020-6,<br>10-79020-16,<br>10-79020-18,<br>10-79020-18  | S6LN-25,<br>S6LN-25,<br>S6LN-25,<br>S6LN-25 |   |                                      |  |   |
| 10-500556-101                     | S6RSC-25P                      | 10-79020-119  | S6RN-25P                                    |   |                                      |  |   |
| 10-500556-103                     | S6LSC-25P                      | 10-79020-118  | S6LN-25P                                    |   |                                      |  |   |
| 10-500556-203                     | S6LSC-25T                      | 10-79020-11,<br>10-79020-17                                 | S6LN-25,<br>S6LN-25                         |   |                                      |  |   |
| 10-600604-1                       | S4RSC-201                      | 10-163015-3   | S4RN-201                                    |   |                                      |  |   |
| 10-600606-1                       | S6RSC-201                      | 10-163020-3   | S6RN-201                                    |   |                                      |  |   |
| 10-600606-3                       | S6LSC-201                      | 10-163020-4   | S6LN-201                                    |   |                                      |  |   |
| 10-600614-1                       | S4LSC-201                      | 10-163005-2   | S4LN-200                                    |   |                                      |  |   |
| 10-600614-2                       | S4LSC-200                      | 10-163005-11  | S4LN-200                                    |   |                                      |  |   |
| 10-600614-3                       | S4LSC-200                      | 10-163005-3   | S4LN-200                                    |   |                                      |  |   |
| 10-600616-3                       | S6LSC-200                      | 10-163010-10  | S6LN-200                                    |   |                                      |  |   |
| 10-600616-4                       | S6RSC-200                      | 10-163010-1   | S6RN-200                                    |   |                                      |  |   |

| ENGINE<br>Teledyne<br>Continental | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |              | GOLD SEAL<br>HARNESSES |                         |
|-----------------------------------|-------|-------------------------------|--------------|--------------|---------------|--------------|------------------------|-------------------------|
|                                   |       |                               | Type         | Part No      | Type          | Part No      | Spark<br>Plug          | Complete<br>Harness P/N |
| A-65, A-75                        | 45    | 10-400458                     | S4RSC-21     | 10-500514-3  | S4RSC-204     | 10-600644-3  | 5/8-24                 | 10-821471-3             |
| A-65, A-75                        | 45    | 10-400459                     | S4RSC-21     | 10-500514-3  | S4RSC-21      | 10-500514-3  | 5/8-24                 | 10-821471-3             |
| A-65, A-75                        | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-3             |
| C-75-8                            | 45    | 10-400458                     | S4RSC-21     | 10-500514-3  | S4RSC-204     | 10-600644-3  | 5/8-24                 | 10-821471-3             |
| C-75-8                            | 45    | 10-400459                     | S4RSC-21     | 10-500514-3  | S4RSC-21      | 10-500514-3  | 5/8-24                 | 10-821471-3             |
| C-75-8                            | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-3             |
| C-75-12                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-75-12                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-75-15                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-75-15                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-85-8                            | 45    | 10-400458                     | S4RSC-21     | 10-500514-3  | S4RSC-204     | 10-600644-3  | 5/8-24                 | 10-821471-3             |
| C-85-8                            | 45    | 10-400459                     | S4RSC-21     | 10-500514-3  | S4RSC-21      | 10-500514-3  | 5/8-24                 | 10-821471-3             |
| C-85-8                            | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-3             |
| C-85-12                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-85-12                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-85-14                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-85-14                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-85-15                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-85-15                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-90-8                            | 45    | 10-400459                     | S4RSC-21     | 10-500514-3  | S4RSC-21      | 10-500514-3  | 5/8-24                 | 10-821471-3             |
| C-90-8                            | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-3             |
| C-90-12                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-90-12                           | 45    | -                             | S4LSC-200    | 10-600614-3  | S4LSC-204     | 10-600644-4  | 5/8-24                 | 10-821471-1             |
| C-90-12                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-90-14                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-90-14                           | 45    | -                             | S4LSC-200    | 10-600614-3  | S4LSC-204     | 10-600644-4  | 5/8-24                 | 10-821471-1             |
| C-90-14                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-90-16                           | 45    | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1  | 5/8-24                 | 10-821471-1             |
| C-90-16                           | 45    | -                             | S4LSC-200    | 10-600614-3  | S4LSC-204     | 10-600644-4  | 5/8-24                 | 10-821471-1             |
| C-90-16                           | 2, 45 | -                             | 4300         | -            | 4300          | -            | 5/8-24                 | 10-821401-1             |
| C-125-2                           | -     | 10-400455                     | S6LSC-21     | 10-500516-4  | S6LSC-21      | 10-500516-4  | 5/8-24                 | 10-821672-9             |
| C-145-2,2H                        | -     | 10-400455                     | S6LSC-21     | 10-500516-4  | S6LSC-21      | 10-500516-4  | 5/8-24                 | 10-821672-9             |
| E-165-2, 3, 4                     | 39    | -                             | S6LSC-21     | 10-500516-3  | S6LSC-21      | 10-500516-3  | 5/8-24                 | 10-821672-13            |
| E-165-2, 3, 4                     | 40    | -                             | S6LSC-21     | 10-500516-10 | S6LSC-21      | 10-500516-10 | 5/8-24                 | 10-821672-13            |
| E-185-1, 2, 3, 5,<br>8, 9, 10, 11 | 39    | -                             | S6LSC-21     | 10-500516-3  | S6LSC-21      | 10-500516-3  | 5/8-24                 | 10-821672-13            |
| E-185-1, 2, 3, 5,<br>8, 9, 10, 11 | 40    | -                             | S6LSC-21     | 10-500516-10 | S6LSC-21      | 10-500516-10 | 5/8-24                 | 10-821672-13            |

| ENGINE<br>Teledyne<br>Continental | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESS |                         |
|-----------------------------------|-------|-------------------------------|--------------|--------------|---------------|---------------|----------------------|-------------------------|
|                                   |       |                               | Type         | Part No      | Type          | Part No       | Spark<br>Plug        | Complete<br>Harness P/N |
| O-200-A,B,C                       | -     | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-1             |
| O-200-A,B,C                       | -     | -                             | S4LSC-200    | 10-600614-3  | S4LSC-204     | 10-600644-4   | 5/8-24               | 10-821471-1             |
| O-200-A,B,C                       | 25    | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3   | 5/8-24               | -                       |
| O-200-A,B,C                       | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-1             |
| E-225-2,4,8,9                     | 39    | -                             | S6LSC-21     | 10-500516-3  | S6LSC-21      | 10-500516-3   | 5/8-24               | 10-821672-13            |
| E-225-2,4,8,9                     | 40    | -                             | S6LSC-21     | 10-500516-10 | S6LSC-21      | 10-500516-10  | 5/8-24               | 10-821672-13            |
| IO-240-A                          | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1   | 3/4-20               | 10-821474-7             |
| O-240-A,D                         | -     | 10-400452                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-1             |
| O-240-A,D                         | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-1             |
| GO-300-A, B, C,<br>D, E, F        | -     | -                             | S6RSC-21     | 10-500516-6  | S6RSC-21      | 10-500516-6   | 5/8-24               | 10-821672-15            |
| O-300-A, B, C,<br>D, E            | -     | 10-400455                     | S6LSC-21     | 10-500516-4  | S6LSC-21      | 10-500516-4   | 5/8-24               | 10-821672-9             |
| O-300-A, B, C,<br>D, E            | -     | -                             | S6LSC-200    | 10-600616-6  | S6LSC-204     | 10-600646-3   | 5/8-24               | 10-821672-9             |
| O-300-A, B, C,<br>D, E            | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24               | 10-821601-9             |
| IO-346-A,B                        | -     | -                             | S4LSC-201    | 10-600604-1  | S4LSC-205     | 10-600654-1   | 3/4-20               | 10-821474-5             |
| IO-360-A                          | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-C                          | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-C                          | 3     | -                             | S6LSC-25     | 10-500556-3  | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3             |
| IO-360-CB                         | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-CB                         | 3     | -                             | S6LSC-25     | 10-500556-3  | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3             |
| IO-360-D                          | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-D                          | 3     | -                             | S6LSC-25     | 10-500556-3  | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3             |
| IO-360-DB                         | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-ES                         | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-G                          | 3     | -                             | S6LSC-25     | 10-500556-3  | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3             |
| IO-360-GB                         | 3     | -                             | S6LSC-25     | 10-500556-3  | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3             |
| IO-360-H                          | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-HB                         | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-J                          | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-JB                         | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-K                          | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-KB                         | -     | 10-400475                     | S6LSC-25     | 10-500556-3  | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3             |
| IO-360-KB                         | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20               | 10-821604-3             |

| ENGINE<br>Teledyne<br>Continental | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESS |                     |     |
|-----------------------------------|-------|-------------------------------|--------------|---------------|---------------|---------------|----------------------|---------------------|-----|
|                                   |       |                               | Type         | Part No       | Type          | Part No       | Spark<br>Plug        | Complete<br>Harness | P/N |
| LTSIO-360-E                       | -     | -                             | S6RSC-25     | 10-500556-1   | S6RSC-25      | 10-500556-1   | 3/4-20               | 10-821674-3         |     |
| LTSIO-360-E                       | 31    | 10-400463                     | S6RSC-25P    | 10-500556-101 | S6RSC-25P     | 10-500556-101 | 3/4-20               | 10-821674-3         |     |
| LTSIO-360-EB                      | -     | -                             | S6RSC-25     | 10-500556-1   | S6RSC-25      | 10-500556-1   | 3/4-20               | 10-821674-3         |     |
| LTSIO-360-EB                      | 31    | 10-400463                     | S6RSC-25P    | 10-500556-101 | S6RSC-25P     | 10-500556-101 | 3/4-20               | 10-821674-3         |     |
| LTSIO-360-KB                      | -     | -                             | S6RSC-25     | 10-500556-1   | S6RSC-25      | 10-500556-1   | 3/4-20               | 10-821674-3         |     |
| LTSIO-360-KB                      | 31    | 10-400463                     | S6RSC-25P    | 10-500556-101 | S6RSC-25P     | 10-500556-101 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-A                        | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-A                        | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-AB                       | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-AB                       | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-B                        | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-C                        | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-CB                       | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-D                        | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-DB                       | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-E                        | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-E                        | 31    | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-EB                       | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-EB                       | 31    | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-F                        | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-F                        | 31    | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-FB                       | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-FB                       | 31    | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-GB                       | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-GB                       | 31    | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-GB                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-821604-3         |     |
| TSIO-360-H                        | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-HB                       | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-JB                       | 3     | -                             | S6LSC-25     | 10-500556-3   | S6LSC-25T     | 10-500556-203 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-KB                       | -     | 10-400475                     | S6LSC-25     | 10-500556-3   | S6LSC-25      | 10-500556-3   | 3/4-20               | 10-821674-3         |     |
| TSIO-360-KB                       | 31    | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-LB                       | 31    | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-LB                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-821604-3         |     |
| TSIO-360-MB                       | 33,31 | 10-400462                     | S6LSC-25P    | 10-500556-103 | S6LSC-25P     | 10-500556-103 | 3/4-20               | 10-821674-3         |     |
| TSIO-360-MB                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-821604-3         |     |

| ENGINE<br>Teledyne<br>Continental | IGNITION<br>SYSTEM<br>Notes Kit P/N | LEFT MAGNETO |           | RIGHT MAGNETO |           | GOLD SEAL<br>HARNESSES |                         |
|-----------------------------------|-------------------------------------|--------------|-----------|---------------|-----------|------------------------|-------------------------|
|                                   |                                     | Type         | Part No   | Type          | Part No   | Spark<br>Plug          | Complete<br>Harness P/N |
| GIO-470-A                         | -                                   | -            | S6LSC-201 | 10-600606-3   | S6LSC-205 | 10-600656-3            | 3/4-20 10-823674-1      |
| IO-470-C                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-D                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-D                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-E                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-E                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-F                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-F                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-F                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5            | 3/4-20 10-823684-1      |
| IO-470-F                          | -                                   | 10-400478    | S6RN-1201 | 10-349220-5   | S6RN-1205 | 10-349260-6            | 3/4-20 10-823684-1      |
| IO-470-F                          | 2                                   | -            | 6300      | 6300          | -         | -                      | 3/4-20 10-823604-1      |
| IO-470-G                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-H                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-J                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5            | 3/4-20 10-823684-1      |
| IO-470-J                          | 2                                   | -            | 6300      | 6300          | -         | -                      | 3/4-20 10-823604-1      |
| IO-470-K                          | -                                   | 10-400478    | S6RN-1201 | 10-349220-5   | S6RN-1205 | 10-349260-6            | 3/4-20 10-823684-1      |
| IO-470-K                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5            | 3/4-20 10-823684-1      |
| IO-470-K                          | 2                                   | -            | 6300      | 6300          | -         | -                      | 3/4-20 10-823604-1      |
| IO-470-L                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-L                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5            | 3/4-20 10-823684-1      |
| IO-470-L                          | 2                                   | -            | 6300      | 6300          | -         | -                      | 3/4-20 10-823604-1      |
| IO-470-M                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-N                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-N                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5            | 3/4-20 10-823684-1      |
| IO-470-N                          | 2                                   | -            | 6300      | 6300          | -         | -                      | 3/4-20 10-823604-1      |
| IO-470-P                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-R                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| IO-470-S                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-S                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5            | 3/4-20 10-823684-1      |
| IO-470-S                          | 2                                   | -            | 6300      | 6300          | -         | -                      | 3/4-20 10-823604-1      |
| IO-470-U                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| IO-470-V                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1            | 3/4-20 10-823674-1      |
| O-470-A                           | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| O-470-B                           | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| O-470-E                           | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 3/4-20 10-823674-1      |
| O-470-G                           | -                                   | 10-400466    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1            | 5/8-24 10-823671-1      |

| ENGINE<br>Teledyne<br>Continental | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-----------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|----------------------|-------------------------|
|                                   |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| O-470-J                           | -     | 10-400466                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 5/8-24               | 10-823671-1             |
| O-470-K                           | -     | 10-400466                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 5/8-24               | 10-823671-1             |
| O-470-L                           | -     | 10-400466                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 5/8-24               | 10-823671-1             |
| O-470-L                           | -     | -                             | S6RSC-201    | 10-600606-1 | S6RSC-205     | 10-600656-1 | 5/8-24               | 10-823671-1             |
| O-470-M                           | -     | 10-400451                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 3/4-20               | 10-823674-1             |
| O-470-P                           | -     | 10-400451                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 3/4-20               | 10-823674-1             |
| O-470-R                           | -     | 10-400451                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 3/4-20               | 10-823674-1             |
| O-470-R                           | -     | 10-400443                     | S6RSC-201    | 10-600606-1 | S6RSC-205     | 10-600656-1 | 3/4-20               | 10-823674-1             |
| O-470-R                           | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4 | S6RN-1225     | 10-349350-5 | 3/4-20               | 10-823684-1             |
| O-470-R                           | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-823604-1             |
| O-470-S                           | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4 | S6RN-1225     | 10-349350-5 | 3/4-20               | 10-823684-1             |
| O-470-S                           | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-823604-1             |
| O-470-U                           | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4 | S6RN-1225     | 10-349350-5 | 3/4-20               | 10-823684-1             |
| O-470-U                           | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-823604-1             |
| O-470-2                           | -     | 10-400466                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 5/8-24               | 10-823671-1             |
| O-470-2                           | -     | 10-400451                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 3/4-20               | 10-823674-1             |
| O-470-4                           | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-21      | 10-500516-3 | 5/8-24               | 10-821672-17            |
| O-470-7, 7A, 7B                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-21      | 10-500516-3 | 5/8-24               | 10-821672-13            |
| O-470-11, 11B                     | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-21      | 10-500516-3 | 5/8-24               | 10-821672-17            |
| O-470-13, 13A                     | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-21      | 10-500516-3 | 5/8-24               | 10-821672-17            |
| O-470-15                          | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-21      | 10-500516-3 | 5/8-24               | 10-821672-17            |
| TSIO-470-B,C,D                    | -     | 10-400451                     | S6RSC-25     | 10-500556-1 | S6RSC-25      | 10-500556-1 | 3/4-20               | 10-823674-1             |
| TSIO-470-B,C,D                    | -     | 10-400443                     | S6RSC-201    | 10-600606-1 | S6RSC-205     | 10-600656-1 | 3/4-20               | 10-823674-1             |
| GTSIO-520-C                       | -     | -                             | S6LSC-201    | 10-600606-3 | S6LSC-205     | 10-600656-3 | 3/4-20               | 10-823674-5             |
| GTSIO-520-D                       | -     | 10-400476                     | S6LN-1201    | 10-349220-4 | S6LN-1205     | 10-349260-7 | 3/4-20               | 10-823684-5             |
| GTSIO-520-D                       | 34,29 | 10-349640-2                   | S6LN-1251    | 10-349420-2 | S6LN-1255     | 10-349460-2 | 3/4-20               | 10-823694-5             |
| GTSIO-520-F                       | -     | 10-400476                     | S6LN-1201    | 10-349220-4 | S6LN-1205     | 10-349260-7 | 3/4-20               | 10-823684-5             |
| GTSIO-520-H                       | -     | 10-400476                     | S6LN-1201    | 10-349220-4 | S6LN-1205     | 10-349260-7 | 3/4-20               | 10-823684-5             |
| GTSIO-520-H                       | 34,29 | 10-349640-2                   | S6LN-1251    | 10-349420-2 | S6LN-1255     | 10-349460-2 | 3/4-20               | 10-823694-5             |
| GTSIO-520-K                       | -     | 10-400476                     | S6LN-1201    | 10-349220-4 | S6LN-1205     | 10-349260-7 | 3/4-20               | 10-823684-5             |
| GTSIO-520-L                       | -     | 10-400476                     | S6LN-1201    | 10-349220-4 | S6LN-1205     | 10-349260-7 | 3/4-20               | 10-823684-5             |
| GTSIO-520-L                       | 34,29 | 10-349640-2                   | S6LN-1251    | 10-349420-2 | S6LN-1255     | 10-349460-2 | 3/4-20               | 10-823694-5             |
| GTSIO-520-M                       | -     | 10-400476                     | S6LN-1201    | 10-349220-4 | S6LN-1205     | 10-349260-7 | 3/4-20               | 10-823684-5             |

| ENGINE<br>Teledyne<br>Continental | IGNITION<br>SYSTEM<br>Notes Kit P/N | LEFT MAGNETO |           | RIGHT MAGNETO |           | GOLD SEAL<br>HARNESS |                         |             |
|-----------------------------------|-------------------------------------|--------------|-----------|---------------|-----------|----------------------|-------------------------|-------------|
|                                   |                                     | Type         | Part No   | Type          | Part No   | Spark<br>Plug        | Complete<br>Harness P/N |             |
| GTSIO-520-N                       | -                                   | 10-400476    | S6LN-1201 | 10-349220-4   | S6LN-1205 | 10-349260-7          | 3/4-20                  | 10-823684-5 |
| GTSIO-520-N                       | 34,29                               | 10-349640-2  | S6LN-1251 | 10-349420-2   | S6LN-1255 | 10-349460-2          | 3/4-20                  | 10-823694-5 |
| IO-520-A                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1          | 3/4-20                  | 10-823674-1 |
| IO-520-A                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-A                          | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-B                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1          | 3/4-20                  | 10-823674-1 |
| IO-520-BA                         | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1          | 3/4-20                  | 10-823674-1 |
| IO-520-BA                         | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1          | 3/4-20                  | 10-823674-1 |
| IO-520-BA                         | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-BA                         | -                                   | 10-400478    | S6RN-1201 | 10-349220-5   | S6RN-1205 | 10-349260-6          | 3/4-20                  | 10-823684-1 |
| IO-520-BA                         | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-BB                         | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1          | 3/4-20                  | 10-823674-1 |
| IO-520-BB                         | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1          | 3/4-20                  | 10-823674-1 |
| IO-520-BB                         | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-BB                         | -                                   | 10-400478    | S6RN-1201 | 10-349220-5   | S6RN-1205 | 10-349260-6          | 3/4-20                  | 10-823684-1 |
| IO-520-BB                         | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-C                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-C                          | -                                   | 10-400478    | S6RN-1201 | 10-349220-5   | S6RN-1205 | 10-349260-6          | 3/4-20                  | 10-823684-1 |
| IO-520-C                          | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-CB                         | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-CB                         | -                                   | 10-400478    | S6RN-1201 | 10-349220-5   | S6RN-1205 | 10-349260-6          | 3/4-20                  | 10-823684-1 |
| IO-520-CB                         | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-D                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1          | 3/4-20                  | 10-823674-1 |
| IO-520-D                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-D                          | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-E                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1          | 3/4-20                  | 10-823674-1 |
| IO-520-F                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1          | 3/4-20                  | 10-823674-1 |
| IO-520-F                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-F                          | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-J                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-J                          | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-K                          | -                                   | 10-400451    | S6RSC-25  | 10-500556-1   | S6RSC-25  | 10-500556-1          | 3/4-20                  | 10-823674-1 |
| IO-520-K                          | 3                                   | -            | S6RN-1201 | 10-349220-5   | S6RN-1205 | 10-349260-3          | 3/4-20                  | 10-823684-1 |
| IO-520-L                          | -                                   | 10-357395-40 | S6RN-1225 | 10-349350-4   | S6RN-1225 | 10-349350-5          | 3/4-20                  | 10-823684-1 |
| IO-520-L                          | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |
| IO-520-M                          | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1          | 3/4-20                  | 10-823674-1 |
| IO-520-MB                         | -                                   | 10-400443    | S6RSC-201 | 10-600606-1   | S6RSC-205 | 10-600656-1          | 3/4-20                  | 10-823674-1 |
| LTSIO-520-AE                      | -                                   | 10-357397-41 | S6LN-1225 | 10-349350-6   | S6LN-1225 | 10-349350-7          | 3/4-20                  | 10-823684-1 |
| LTSIO-520-AE                      | 2                                   | -            | 6300      | -             | 6300      | -                    | 3/4-20                  | 10-823604-1 |



| ENGINE<br>Teledyne<br>Continental | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESSES |                      |
|-----------------------------------|-------|-------------------------------|--------------|---------------|---------------|---------------|------------------------|----------------------|
|                                   |       |                               | Type         | Part No       | Type          | Part No       | Spark Plug             | Complete Harness P/N |
| TSIO-520-AE                       | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-AE                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-520-AF                       | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-AF                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-520-B                        | -     | 10-400443                     | S6RSC-201    | 10-600606-1   | S6RSC-205     | 10-600656-1   | 3/4-20                 | 10-823674-1          |
| TSIO-520-BB                       | -     | 10-400443                     | S6RSC-201    | 10-600606-1   | S6RSC-205     | 10-600656-1   | 3/4-20                 | 10-823674-1          |
| TSIO-520-BE                       | 32,31 | -                             | S6RSC-25P    | 10-500556-901 | S6RSC-25P     | 10-500556-101 | 3/4-20                 | 10-823674-7          |
| TSIO-520-BE                       | 32,31 | -                             | S6RSC-25P    | 10-500556-101 | S6RSC-25P     | 10-500556-101 | 3/4-20                 | 10-823674-7          |
| TSIO-520-BE                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-7          |
| TSIO-520-C                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-C                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-520-CE                       | -     | 10-357396-41                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-7          |
| TSIO-520-CE                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-7          |
| TSIO-520-D                        | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-D                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-D                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-520-DB                       | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-DB                       | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-DB                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-520-E                        | -     | 10-400443                     | S6RSC-201    | 10-600606-1   | S6RSC-205     | 10-600656-1   | 3/4-20                 | 10-823674-1          |
| TSIO-520-EB                       | -     | 10-400443                     | S6RSC-201    | 10-600606-1   | S6RSC-205     | 10-600656-1   | 3/4-20                 | 10-823674-1          |
| TSIO-520-G                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-G                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-530-H                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-H                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-520-J                        | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-JB                       | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-K                        | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-KB                       | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-L                        | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-LB                       | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-M                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20                 | 10-823684-1          |
| TSIO-520-M                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-823604-1          |
| TSIO-520-N                        | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20                 | 10-823684-1          |
| TSIO-520-N                        | 34,29 | 10-349640-1                   | S6RN-1251    | 10-349420-1   | S6RN-1255     | 10-349460-1   | 3/4-20                 | 10-823694-1          |

| ENGINE<br>Teledyne<br>Continental | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESS |                         |
|-----------------------------------|-------|-------------------------------|--------------|---------------|---------------|---------------|----------------------|-------------------------|
|                                   |       |                               | Type         | Part No       | Type          | Part No       | Spark<br>Plug        | Complete<br>Harness P/N |
| TSIO-520-NB                       | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20               | 10-823684-1             |
| TSIO-520-NB                       | 34    | 10-349640-1                   | S6RN-1251    | 10-349420-1   | S6RN-1255     | 10-349460-1   | 3/4-20               | 10-823694-1             |
| TSIO-520-P                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| TSIO-520-P                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-823604-1             |
| TSIO-520-R                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| TSIO-520-R                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-823604-1             |
| TSIO-520-T                        | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| TSIO-520-T                        | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-823604-1             |
| TSIO-520-UB                       | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20               | 10-823684-1             |
| TSIO-520-UB                       | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| TSIO-520-UB                       | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-823604-1             |
| TSIO-520-VB                       | -     | 10-400443                     | S6RSC-201    | 10-600606-1   | S6RSC-205     | 10-600656-1   | 3/4-20               | 10-823674-1             |
| TSIO-520-WB                       | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20               | 10-823684-1             |
| IO-550-A                          | -     | 10-400443                     | S6RSC-201    | 10-600606-1   | S6RSC-205     | 10-600656-1   | 3/4-20               | 10-823674-1             |
| IO-550-B                          | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| IO-550-B                          | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-823604-1             |
| IO-550-C                          | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| IO-550-C                          | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-823604-1             |
| IO-550-D                          | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| IO-550-D                          | -     | 10-400478                     | S6RN-1201    | 10-349220-5   | S6RN-1205     | 10-349260-6   | 3/4-20               | 10-823684-1             |
| IO-550-E                          | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| IO-550-F                          | -     | 10-400451                     | S6RSC-25     | 10-500556-1   | S6RSC-25      | 10-500556-1   | 3/4-20               | 10-823674-1             |
| IO-550-G                          | -     | -                             | S6RSC-25     | 10-500556-1   | S6RSC-25      | 10-500556-1   | 3/4-20               | 10-823674-19            |
| IO-550-L                          | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| IO-550-L                          | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20               | 10-823604-1             |
| TSIO-550-A                        | 31    | -                             | S6RSC-25P    | 10-500556-101 | S6RSC-25P     | 10-500556-101 | 3/4-20               | 10-823674-7             |
| TSIO-550-B                        | 31    | -                             | S6RSC-25P    | 10-500556-101 | S6RSC-25P     | 10-500556-101 | 3/4-20               | 10-823674-7             |
| TSIOL-550-A                       | 29    | 10-349640-1                   | S6RN-1251    | 10-349420-1   | S6RN-1255     | 10-349460-1   | 3/4-20               | 10-823694-1             |
| TSIOL-550-B                       | -     | 10-357395-40                  | S6RN-1225    | 10-349350-4   | S6RN-1225     | 10-349350-5   | 3/4-20               | 10-823684-1             |
| 6-285-B,C,CA                      | -     | 10-785286-402                 | D6RN-3200    | 10-682610-221 | DUAL MAGNETO  |               | 3/4-20               | 10-821635-11            |
| 6-320-B                           | -     | 10-785286-402                 | D6RN-3200    | 10-682610-221 | DUAL MAGNETO  |               | 3/4-20               | 10-821635-11            |

**GOLD SEAL  
HARNESS**

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| O-235-C1                      | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-235-C1                      | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-16            |
| O-235-C1                      | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-235-C1                      | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-235-C1A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-235-C1A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-235-C1A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-235-C1A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-235-C1B                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-235-C1B                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-235-C1B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-235-C1C                     | 4     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-235-C1C                     | 4     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-235-C1C                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-235-C1C                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-235-C1C                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-235-C1C                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-235-C2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-235-C2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-16            |
| O-235-C2A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-235-C2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-235-C2B                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| O-235-C2B                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| O-235-C2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-235-C2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-235-C2C                     | 5     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-235-C2C                     | 5     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-235-C2C                     | 5, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-235-C2C                     | 5, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-235-C2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-235-C2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-235-E1                      | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-235-E1                      | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-235-E1                      | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-235-E1                      | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-235-E1B                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-235-E1B                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-235-E2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-235-E2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-16            |
| O-235-E2A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-235-E2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-235-E2B                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| O-235-E2B                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| O-235-F1                      | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-235-F1                      | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-235-F1                      | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-235-F1                      | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-235-F1B                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-235-F1B                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-235-F1B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-235-F2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-235-F2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-235-F2A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-235-F2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-235-F2B                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-235-F2B                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-235-F2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-235-F2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-235-G1                      | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-235-G1                      | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-235-G1                      | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-235-G1                      | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-235-G1B                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-235-G1B                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-235-G2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-235-G2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-235-G2A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-235-G2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-235-G2B                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-235-G2B                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-235-H2C                     | 1     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-235-H2C                     | 1     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-235-H2C                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-235-H2C                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-235-H2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-235-H2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-235-J2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-235-J2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-235-J2A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-235-J2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-235-J2B                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-235-J2B                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-235-K2A                     | -     | -                             | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-235-K2A                     | -     | -                             | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-235-K2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM |     | LEFT MAGNETO |             | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|--------------------|-----|--------------|-------------|---------------|---------------|----------------------|-------------------------|
|                               |       | Kit                | P/N | Type         | Part No     | Type          | Part No       | Spark<br>Plug        | Complete<br>Harness P/N |
| O-235-K2B                     | -     | 10-400483          |     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24               | 10-821481-2             |
| O-235-K2B                     | -     | 10-400484          |     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20               | 10-821484-2             |
| O-235-K2B                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| O-235-K2B                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| O-235-K2C                     | 6     | 10-400453          |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| O-235-K2C                     | 6     | 10-400460          |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| O-235-K2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| O-235-K2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| O-235-L2A                     | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-235-L2A                     | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-235-L2A                     | 3     | 10-400461          |     | S4LSC-21     | 10-500514-2 | S4LSC-204T    | 10-600644-201 | 5/8-24               | 10-821471-16            |
| O-235-L2A                     | 3     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204T    | 10-600644-201 | 3/4-20               | 10-821474-16            |
| O-235-L2A                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| O-235-L2C                     | 7     | 10-400453          |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| O-235-L2C                     | 7     | 10-400460          |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| O-235-L2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| O-235-L2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| O-235-M1                      | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-235-M1                      | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-235-M1                      | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| O-235-M2C                     | 1     | 10-400450          |     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| O-235-M2C                     | 1     | 10-400454          |     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| O-235-M2C                     | 1, 44 | 10-400436          |     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-2             |
| O-235-M2C                     | 1, 44 | 10-400428          |     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20               | 10-821474-2             |
| O-235-M2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| O-235-M2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| O-235-M3C                     | 1     | 10-400450          |     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| O-235-M3C                     | 1     | 10-400454          |     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| O-235-M3C                     | 1, 44 | 10-400436          |     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-2             |
| O-235-M3C                     | 1, 44 | 10-400428          |     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20               | 10-821474-2             |
| O-235-M3C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| O-235-M3C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| O-235-N2A                     | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-235-N2A                     | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-235-N2A                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| O-235-N2C                     | 8     | 10-400450          |     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| O-235-N2C                     | 8     | 10-400454          |     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| O-235-N2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| O-235-N2C                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| O-235-P1                      | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-235-P1                      | -     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-235-P1                      | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| O-235-P2A                     | 3     | 10-400461          |     | S4LSC-21     | 10-500514-2 | S4LSC-204T    | 10-600644-201 | 5/8-24               | 10-821471-16            |
| O-235-P2A                     | 3     | -                  |     | S4LSC-21     | 10-500514-2 | S4LSC-204T    | 10-600644-201 | 3/4-20               | 10-821474-16            |
| O-235-P2A                     | 2     | -                  |     | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| O-235-P2C                     | 1     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-235-P2C                     | 1     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-235-P2C                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-235-P2C                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-235-P2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-235-P2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-235-P3C                     | 1     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-235-P3C                     | 1     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-235-P3C                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-235-P3C                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-235-P3C                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-235-P3C                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-290-D(-11)                  | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-290-D(-11)                  | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-290-D(-11)                  | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-290-D2                      | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2                      | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-290-D2                      | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2                      | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-290-D2                      | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-290-D2                      | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-290-D2A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-290-D2A                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2A                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-290-D2B                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2B                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-290-D2B                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2B                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-290-D2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-290-D2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-290-D2C                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2C                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-290-D2C                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-290-D2C                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| AIO-320-A1A                   | -     | 10-400485                     | S4LN-1208    | 10-349285-1 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-320-A1A                   | -     | 10-400486                     | S4LN-1208    | 10-349285-1 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-320-A1B                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-320-A1B                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-320-A1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| AIO-320-A1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| AIO-320-A2A                   | -     | 10-400485                     | S4LLN-1208   | 10-349285-1 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-320-A2A                   | -     | 10-400486                     | S4LLN-1208   | 10-349285-1 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-320-A2B                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-320-A2B                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| AIO-320-B1B                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| AIO-320-B1B                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| AIO-320-B1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| AIO-320-B1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| AIO-320-C1B                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| AIO-320-C1B                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| AIO-320-C1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| AIO-320-C1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| AEIO-320-D1B                  | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| AEIO-320-D1B                  | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| AEIO-320-D1B                  | 3     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-5 | 5/8-24               | 10-821481-2             |
| AEIO-320-D1B                  | 3     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-5 | 3/4-20               | 10-821484-2             |
| AEIO-320-D1B                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| AEIO-320-D1B                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| AEIO-320-D2B                  | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| AEIO-320-D2B                  | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| AEIO-320-D2B                  | 3     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-5 | 5/8-24               | 10-821481-2             |
| AEIO-320-D2B                  | 3     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-5 | 3/4-20               | 10-821484-2             |
| AEIO-320-D2B                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| AEIO-320-D2B                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| AEIO-320-E1A                  | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| AEIO-320-E1A                  | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-16            |
| AEIO-320-E1A                  | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| AEIO-320-E1A                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-16            |
| AEIO-320-E1B                  | 1     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| AEIO-320-E1B                  | 1     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| AEIO-320-E1B                  | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| AEIO-320-E1B                  | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| AEIO-320-E1B                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| AEIO-320-E1B                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| AEIO-320-E2A                  | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| AEIO-320-E2A                  | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-16            |
| AEIO-320-E2A                  | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| AEIO-320-E2A                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-16            |
| AEIO-320-E2B                  | 1     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| AEIO-320-E2B                  | 1     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| AEIO-320-E2B                  | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| AEIO-320-E2B                  | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| AEIO-320-E2B                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| AEIO-320-E2B                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| IO-320-A1A                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| IO-320-A1A                    | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| IO-320-A2A                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| IO-320-A2A                    | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| IO-320-B1A                    | -     | 10-400430                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821472-22            |
| IO-320-B1A                    | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-22            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|---------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No       | Spark<br>Plug          | Complete<br>Harness P/N |
| IO-320-B1B                    | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| IO-320-B1B                    | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| IO-320-B1B                    | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| IO-320-B1B                    | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| IO-320-B1C                    | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| IO-320-B1C                    | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| IO-320-B1C                    | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| IO-320-B1C                    | 3     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204T    | 10-600644-201 | 5/8-24                 | 10-821471-16            |
| IO-320-B1C                    | 3     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204T    | 10-600644-201 | 3/4-20                 | 10-821474-16            |
| IO-320-B1C                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| IO-320-B1D                    | -     | 10-400485                     | S4LN-1208    | 10-349285-1 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| IO-320-B1D                    | -     | 10-400486                     | S4LN-1208    | 10-349285-1 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| IO-320-B1D                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| IO-320-B1D                    | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| IO-320-B1E                    | 1     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| IO-320-B1E                    | 1     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| IO-320-B1E                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| IO-320-B1E                    | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| IO-320-B2A                    | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| IO-320-B2A                    | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| IO-320-B2A                    | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| IO-320-B2A                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| IO-320-C1A                    | -     | 10-400430                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821472-22            |
| IO-320-C1A                    | 3     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-21T     | 10-500514-201 | 5/8-24                 | 10-821472-22            |
| IO-320-C1A                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-22            |
| IO-320-C1B                    | -     | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| IO-320-C1B                    | -     | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| IO-320-D1A                    | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| IO-320-D1A                    | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| IO-320-D1A                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| IO-320-D1A                    | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| IO-320-D1B                    | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| IO-320-D1B                    | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| IO-320-D1B                    | 3     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-5   | 5/8-24                 | 10-821481-2             |
| IO-320-D1B                    | 3     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-5   | 3/4-20                 | 10-821484-2             |
| IO-320-D1B                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| IO-320-D1B                    | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| IO-320-D1C                    | 1     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| IO-320-D1C                    | 1     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| IO-320-D1C                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| IO-320-D1C                    | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| IO-320-E1A                    | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| IO-320-E1A                    | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| IO-320-E1A                    | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| IO-320-E1A                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |



| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|---------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No       | Spark<br>Plug        | Complete<br>Harness P/N |
| IO-320-E1B                    | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| IO-320-E1B                    | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| IO-320-E1B                    | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-2             |
| IO-320-E1B                    | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20               | 10-821474-2             |
| IO-320-E1B                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| IO-320-E1B                    | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| IO-320-E2A                    | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| IO-320-E2A                    | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-16            |
| IO-320-E2A                    | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| IO-320-E2A                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| IO-320-E2B                    | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| IO-320-E2B                    | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| IO-320-E2B                    | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-2             |
| IO-320-E2B                    | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20               | 10-821474-2             |
| IO-320-E2B                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-2             |
| IO-320-E2B                    | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20               | 10-821404-2             |
| IO-320-F1A                    | -     | 10-400430                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821472-22            |
| IO-320-F1A                    | 2     | -                             | 4300         | -           | 4300          | -             | 5/8/24               | 10-821401-22            |
| LIO-320-B1A,<br>C1A           | -     | 10-400438                     | S4RSC-21     | 10-500514-4 | S4RSC-21      | 10-500514-4   | 5/8-24               | 10-821472-22            |
| LIO-320-B1A,<br>C1A           | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-22            |
| O-320-A1A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| O-320-A1A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| O-320-A1A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-2             |
| O-320-A1A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20               | 10-821474-2             |
| O-320-A1B                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-320-A1B                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-16            |
| O-320-A1B                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-320-A1B                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| O-320-A2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-320-A2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-16            |
| O-320-A2A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-320-A2A                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| O-320-A2B                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-320-A2B                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24               | 10-821471-16            |
| O-320-A2B                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-320-A2B                     | 3     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204T    | 10-600644-201 | 5/8-24               | 10-821471-16            |
| O-320-A2B                     | 3     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204T    | 10-600644-201 | 3/4-20               | 10-821474-16            |
| O-320-A2B                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |
| O-320-A2C                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| O-320-A2C                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| O-320-A2C                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24               | 10-821401-16            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|---------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No       | Spark<br>Plug          | Complete<br>Harness P/N |
| O-320-A2D                     | 1     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-A2D                     | 1     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-A2D                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-320-A2D                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-320-A2D                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-A2D                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-A3A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-320-A3A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| O-320-A3A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-320-A3A                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-320-A3B                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-320-A3B                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| O-320-A3B                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-320-A3B                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-320-A3C                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-320-A3C                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-320-A3C                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-320-B1A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-B1A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-B1A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-320-B1A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-320-B1A                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-B1A                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-B1B                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-B1B                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-B1B                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-320-B1B                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-320-B1B                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-B1B                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-B2A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-B2A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-B2A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-320-B2A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-320-B2A                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-B2A                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-B2B                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-320-B2B                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| O-320-B2B                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-320-B2B                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-320-B2C                     | 3     | 10-400477                     | S4LSC-200    | 10-600614-1 | S4LSC-204T    | 10-600644-201 | 5/8-24                 | 10-821471-16            |
| O-320-B2C                     | 3     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204T    | 10-600644-201 | 3/4-20                 | 10-821474-16            |
| O-320-B2C                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-320-B2C                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-320-B2C                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| O-320-B3A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-B3A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-B3A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-B3A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-B3A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-B3A                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-B3B                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-320-B3B                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-320-B3B                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-320-B3B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-320-B3C                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-320-B3C                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-320-B3C                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-320-C1A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-C1A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-C1A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-C1A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-C1A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-C1A                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-C1B                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-C1B                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-C1B                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-C1B                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-C1B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-C1B                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-C2A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-C2A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-C2A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-C2A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-C2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-C2A                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-C2B                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-C2B                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-C2B                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-C2B                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-C2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-C2B                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-C2C                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-C2C                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-C2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-C2C                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-C3A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-C3A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-C3A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-C3A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-C3A                     | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-C3A                     | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |

**GOLD SEAL  
HARNESSES**

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|---------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No       | Spark<br>Plug          | Complete<br>Harness P/N |
| O-320-C3B                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-C3B                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-C3B                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-320-C3B                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-320-C3B                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-C3B                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-C3C                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-C3C                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-C3C                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-C3C                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-D1A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-320-D1A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| O-320-D1A                     | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-320-D1A                     | 3     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204T    | 10-600644-201 | 5/8-24                 | 10-821471-16            |
| O-320-D1A                     | 3     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204T    | 10-600644-201 | 3/4-20                 | 10-821474-16            |
| O-320-D1A                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-320-D1B                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-D1B                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-D1C                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| O-320-D1C                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| O-320-D1C                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-D1C                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-D1D                     | 1     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-D1D                     | 1     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-D1D                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-320-D1D                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-320-D1D                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-D1D                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-D1F                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| O-320-D1F                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| O-320-D1F                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-D1F                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-D2A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-320-D2A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-320-D2A                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-320-D2A                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-320-D2A                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-D2A                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-320-D2B                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-320-D2B                     | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-320-D2B                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-320-D2C                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| O-320-D2C                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| O-320-D2C                     | 2     | -                             | 4300         | -           | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-320-D2C                     | 2     | -                             | 4300         | -           | 4300          | -             | 3/4-20                 | 10-821404-2             |

| ENGINE<br>Textron<br>Lycoming | Notes  | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|--------|-------------------------------|--------------|-------------|---------------|-------------|----------------------|-------------------------|
|                               |        |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| O-320-D2F                     | -      | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| O-320-D2F                     | -      | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| O-320-D2F                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-D2F                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-320-D2G                     | 1      | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-320-D2G                     | 1      | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-320-D2G                     | 1, 44  | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-320-D2G                     | 1, 44  | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-320-D2G                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-D2G                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-320-D2H                     | 1      | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-320-D2H                     | 1      | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-320-D2H                     | 1, 44  | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-320-D2H                     | 1, 44  | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-320-D2H                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-D2H                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-320 D2J                     | 1      | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-320-D2J                     | 1      | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-320-D2J                     | 1, 44  | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-320-D2J                     | 1, 44  | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-320-D2J                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-D2J                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-320-D3G                     | 10     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-320-D3G                     | 10     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-320-D3G                     | 10, 44 | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-320-D3G                     | 10, 44 | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-320-D3G                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-D2G                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-320-E1A                     | -      | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-320-E1A                     | 44     | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-16            |
| O-320-E1A                     | -      | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-320-E1A                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-320-E1B                     | -      | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-320-E1B                     | -      | 10-400482                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-320-E1C                     | -      | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| O-320-E1C                     | -      | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| O-320-E1C                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-E1C                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-320-E1F                     | -      | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| O-320-E1F                     | -      | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| O-320-E1F                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-E1F                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-320-E1J                     | 11     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| O-320-E1J                     | 11     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| O-320-E1J                     | 2      | -                             | 4300         | -           | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-320-E1J                     | 2      | -                             | 4300         | -           | 4300          | -           | 3/4-20               | 10-821404-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| O-320-E2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-320-E2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-320-E2A                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-320-E2A                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-320-E2B                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-320-E2B                     | -     | -                             | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-320-E2B                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-320-E2C                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-320-E2C                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-320-E2C                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-E2C                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-E2D                     | 1     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-E2D                     | 1     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-E2D                     | 1, 44 | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-E2D                     | 1, 44 | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-E2D                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-E2D                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-E2F                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-320-E2F                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-320-E2G                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-E2G                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-E2G                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-E2G                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-E2G                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-E2G                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-E2H                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-320-E2H                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-320-E2H                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-320-E2H                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-320-E3D                     | 12    | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-E3D                     | 12    | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-E3D                     | 12,44 | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-E3D                     | 12,44 | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-E3D                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-E3D                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-E3H                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-320-E3H                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-320-E3H                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-320-E3H                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-320-E3H                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-320-E3H                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-320-H1AD                    | -     | 10-785124-115                 | D4RN-3000    | 10-682555-14 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-4             |
| O-320-H2AD                    | -     | 10-785124-115                 | D4RN-3000    | 10-682555-14 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-4             |
| O-320-H3AD                    | -     | 10-785124-115                 | D4RN-3000    | 10-682555-14 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-4             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| O-340-A1A, A2A,<br>B1A        | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-340-A1A, A2A,<br>B1A        | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-340-A1A, A2A,<br>B1A        | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-340-A1A, A2A,<br>B1A        | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| AIO-360-A1A                   | -     | -                             | S4LN-1208    | 10-349285-7 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-360-A1A                   | -     | -                             | S4LN-1208    | 10-349285-7 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-360-A1A                   | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| AIO-360-A1A                   | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| AIO-360-A1B                   | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-360-A1B                   | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-360-A1B                   | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1227     | 10-349365-9 | 5/8-24                 | 10-821481-2             |
| AIO-360-A1B                   | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1227     | 10-349365-9 | 3/4-20                 | 10-821484-2             |
| AIO-360-A1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| AIO-360-A1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| AIO-360-A2A                   | -     | 10-400485                     | S4LN-1208    | 10-349285-1 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-360-A2A                   | -     | 10-400486                     | S4LN-1208    | 10-349285-1 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-360-A2B                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-360-A2B                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-360-B1B                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-360-B1B                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-360-B1B                   | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AIO-360-B1B                   | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AIO-360-B1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| AIO-360-B1B                   | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| AEIO-360-A1A                  | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| AEIO-360-A1A                  | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| AEIO-360-A1A                  | -     | -                             | S4LSC-200    | 10-600614-2 | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| AEIO-360-A1A                  | -     | -                             | S4LSC-200    | 10-600614-2 | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| AEIO-360-A1A                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-16            |
| AEIO-360-A1B                  | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AEIO-360-A1B                  | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AEIO-360-A1B                  | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AEIO-360-A1B                  | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AEIO-360-A1B                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| AEIO-360-A1B                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |
| AEIO-360-A1B6                 | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AEIO-360-A1B6                 | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AEIO-360-A1B6                 | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| AEIO-360-A1B6                 | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| AEIO-360-A1B6                 | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24                 | 10-821401-2             |
| AEIO-360-A1B6                 | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20                 | 10-821404-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|---------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug       | Complete<br>Harness P/N |
| AEIO-360-A1D                  | -     | -                             | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-16            |
| AEIO-360-A1D                  | -     | -                             | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-16            |
| AEIO-360-A1D                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-16            |
| AEIO-360-A1E                  | -     | -                             | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-16            |
| AEIO-360-A1E                  | -     | -                             | S4LSC-21     | 10-500514-2 | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-16            |
| AEIO-360-A1E                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-16            |
| AEIO-360-A2A                  | -     | 10-400432                     | S4LSC-200    | 10-600614-2 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-2             |
| AEIO-360-A2A                  | -     | -                             | S4LSC-200    | 10-600614-2 | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-2             |
| AEIO-360-A2B                  | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-2             |
| AEIO-360-A2B                  | -     | -                             | S4LN-1227    | 10-349365-9 | S4LN-1209     | 10-349305-1 | 3/4-20              | 10-821484-2             |
| AEIO-360-B1B                  | -     | 10-400427                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-16            |
| AEIO-360-B1B                  | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-16            |
| AEIO-360-B1B                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-16            |
| AEIO-360-B1F                  | -     | 10-400483                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-2             |
| AEIO-360-B1F                  | -     | 10-400484                     | S4LN-1227    | 10-349365-3 | S4LN-1209     | 10-349305-1 | 3/4-20              | 10-821484-2             |
| AEIO-360-B1F                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-2             |
| AEIO-360-B1F                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20              | 10-821404-2             |
| AEIO-360-B1F6                 | -     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1227     | 10-349365-3 | 5/8-24              | 10-821481-2             |
| AEIO-360-B1F6                 | -     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1227     | 10-349365-3 | 3/4-20              | 10-821484-2             |
| AEIO-360-B1G6                 | 13    | -                             | S4LN-1227    | 10-349365-3 | S4LN-1227     | 10-349365-3 | 5/8-24              | 10-821481-2             |
| AEIO-360-B1G6                 | 13    | -                             | S4LN-1227    | 10-349365-3 | S4LN-1227     | 10-349365-3 | 3/4-20              | 10-821484-2             |
| AEIO-360-B1G6                 | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-2             |
| AEIO-360-B1G6                 | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20              | 10-821404-2             |
| AEIO-360-B2F                  | -     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1227     | 10-349365-3 | 5/8-24              | 10-821481-2             |
| AEIO-360-B2F                  | -     | -                             | S4LN-1227    | 10-349365-3 | S4LN-1227     | 10-349365-3 | 3/4-20              | 10-821484-2             |
| AEIO-360-B2F                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-2             |
| AEIO-360-B2F                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20              | 10-821404-2             |
| AEIO-360-B4A                  | -     | 10-400440                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-16            |
| AEIO-360-B4A                  | 44    | 10-400434                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24              | 10-821471-16            |
| AEIO-360-B4A                  | -     | -                             | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-16            |
| AEIO-360-B4A                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-16            |
| AEIO-360-H1A                  | -     | 10-400450                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-2             |
| AEIO-360-H1A                  | -     | 10-400454                     | S4LSC-21     | 10-500514-1 | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-2             |
| AEIO-360-H1A                  | 44    | 10-400436                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 5/8-24              | 10-821471-2             |
| AEIO-360-H1A                  | 44    | 10-400428                     | S4LSC-21     | 10-500514-1 | S4LSC-21      | 10-500514-1 | 3/4-20              | 10-821474-2             |
| AEIO-360-H1A                  | 2     | -                             | 4300         | -           | 4300          | -           | 5/8-24              | 10-821401-2             |
| AEIO-360-H1A                  | 2     | -                             | 4300         | -           | 4300          | -           | 3/4-20              | 10-821404-2             |
| HIO-360-A1A                   | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-200     | 10-600614-1 | 5/8-24              | 10-821471-2             |
| HIO-360-A1A                   | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-200     | 10-600614-1 | 3/4-20              | 10-821474-2             |
| HIO-360-B1A                   | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-200     | 10-600614-1 | 5/8-24              | 10-821471-2             |
| HIO-360-B1A                   | -     | -                             | S4LSC-200    | 10-600614-1 | S4LSC-200     | 10-600614-1 | 3/4-20              | 10-821474-2             |
| HIO-360-B1B                   | -     | 10-400465                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-2             |
| HIO-360-B1B                   | -     | 10-400482                     | S4LSC-200    | 10-600614-1 | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-2             |



| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug.         | Complete<br>Harness P/N |
| HIO-360-C1A                   | -     |                               | S4LSC-200    | 10-600614-1  | S4LSC-200     | 10-600614-1 | 5/8-24                 | 10-821471-2             |
| HIO-360-C1A                   | -     |                               | S4LSC-200    | 10-600614-1  | S4LSC-200     | 10-600614-1 | 3/4-20                 | 10-821474-2             |
| HIO-360-C1A                   | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| HIO-360-C1A                   | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| HIO-360-C1A                   | -     | 10-400431                     | S4LSC-200    | 10-600614-2  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| HIO-360-C1A                   | -     |                               | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| HIO-360-C1B                   | -     |                               | S4LN-1208    | 10-349285-1  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-16            |
| HIO-360-C1B                   | -     |                               | S4LN-1209    | 10-349285-7  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-16            |
| HIO-360-D1A                   | 30    | 10-400464                     | S4LN-1208    | 10-349285-7  | S4LN-1208     | 10-349285-7 | 5/8-24                 | 10-822482-2             |
| HIO-360-D1A                   | -     |                               | S4LN-1208    | 10-349285-7  | S4LN-1208     | 10-349285-7 | 5/8-24                 | 10-821481-2             |
| HIO-360-D1A                   | 2     |                               | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| HIO-360-E1AD                  | -     | 10-785124-124                 | D4LN-3000    | 10-682555-13 | DUAL MAGNETO  |             | 3/4-20                 | 10-821415-12            |
| HIO-360-E1BD                  | -     | 10-785144-114                 | D4LN-3200    | 10-682605-13 | DUAL MAGNETO  |             | 3/4-20                 | 10-821425-12            |
| HIO-360-F1AD                  | -     | 10-785144-114                 | D4LN-3200    | 10-682605-13 | DUAL MAGNETO  |             | 3/4-20                 | 10-821425-12            |
| HO-360-A1A                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| HO-360-A1A                    | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| HO-360-B1A                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| HO-360-B1A                    | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| HO-360-B1B                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| HO-360-B1B                    | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| IO-360-A1A                    | -     | 10-400427                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| IO-360-A1A                    | -     |                               | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| IO-360-A1A                    | 2     |                               | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| IO-360-A1B                    | -     |                               | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-16            |
| IO-360-A1B                    | -     |                               | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-16            |
| IO-360-A1B                    | 2     |                               | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| IO-360-A1B6                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| IO-360-A1B6                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| IO-360-A1B6                   | -     |                               | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| IO-360-A1B6                   | -     |                               | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| IO-360-A1B6                   | 43    | 10-400448                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-20            |
| IO-360-A1B6                   | 2     |                               | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| IO-360-A1B6                   | 2     |                               | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| IO-360-A1B6                   | 2, 43 |                               | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-20            |
| IO-360-A1B6D                  | 35    | 10-785124-106                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-6             |
| IO-360-A1B6D                  | 36    | 10-785124-110                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-8             |
| IO-360-A1B6D                  | 37    | 10-785124-123                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-18            |
| IO-360-A1C                    | -     |                               | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| IO-360-A1C                    | -     |                               | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| IO-360-A1C                    | 2     |                               | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| IO-360-A1C                    | 2     |                               | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|---------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No       | Spark<br>Plug        | Complete<br>Harness P/N |
| IO-360-A1D                    | -     | -                             | S4LSC-21     | 10-500514-2  | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| IO-360-A1D                    | -     | -                             | S4LSC-21     | 10-500514-2  | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| IO-360-A1D                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-16            |
| IO-360-A1D6                   | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1   | 5/8-24               | 10-821481-2             |
| IO-360-A1D6                   | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1   | 3/4-20               | 10-821484-2             |
| IO-360-A1D6                   | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-2             |
| IO-360-A1D6                   | 2     | -                             | 4300         | -            | 4300          | -             | 3/4-20               | 10-821404-2             |
| IO-360-A1D6D                  | -     | 10-785124-111                 | D4LN-3000    | 10-682555-13 | DUAL MAGNETO  |               | 3/4-20               | 10-821414-6             |
| IO-360-A2A                    | -     | -                             | S4LSC-200    | 10-600614-2  | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| IO-360-A2A                    | -     | -                             | S4LSC-200    | 10-600614-2  | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| IO-360-A2A                    | 3     | -                             | S4LSC-200    | 10-600614-2  | S4LSC-204T    | 10-600644-201 | 5/8-24               | 10-821471-16            |
| IO-360-A2A                    | 3     | -                             | S4LSC-200    | 10-600614-2  | S4LSC-204T    | 10-600644-201 | 3/4-20               | 10-821474-16            |
| IO-360-A2A                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-16            |
| IO-360-A2B                    | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1   | 5/8-24               | 10-821481-2             |
| IO-360-A2B                    | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1   | 3/4-20               | 10-821484-2             |
| IO-360-A2B                    | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1   | 5/8-24               | 10-821481-2             |
| IO-360-A2B                    | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1   | 3/4-20               | 10-821484-2             |
| IO-360-A2B                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-2             |
| IO-360-A2B                    | 2     | -                             | 4300         | -            | 4300          | -             | 3/4-20               | 10-821404-2             |
| IO-360-A2C                    | -     | -                             | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1   | 5/8-24               | 10-821481-2             |
| IO-360-A2C                    | -     | -                             | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1   | 3/4-20               | 10-821484-2             |
| IO-360-A2C                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-2             |
| IO-360-A2C                    | 2     | -                             | 4300         | -            | 4300          | -             | 3/4-20               | 10-821404-2             |
| IO-360-A3B6D                  | -     | 10-785124-106                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |               | 3/4-20               | 10-821414-6             |
| IO-360-B1A                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| IO-360-B1A                    | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| IO-360-B1B                    | -     | 10-400427                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| IO-360-B1B                    | -     | -                             | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| IO-360-B1B                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-16            |
| IO-360-B1C                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-2             |
| IO-360-B1C                    | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-2             |
| IO-360-B1D                    | -     | 10-400427                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 5/8-24               | 10-821471-16            |
| IO-360-B1D                    | 2     | -                             | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1   | 3/4-20               | 10-821474-16            |
| IO-360-B1D                    | 3     | -                             | S4LSC-200    | 10-600614-1  | S4LSC-204T    | 10-600644-201 | 5/8-24               | 10-821471-16            |
| IO-360-B1D                    | 3     | -                             | S4LSC-200    | 10-600614-1  | S4LSC-204T    | 10-600644-201 | 3/4-20               | 10-821474-16            |
| IO-360-B1D                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-16            |
| IO-360-B1E                    | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1   | 5/8-24               | 10-821481-2             |
| IO-360-B1E                    | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1   | 3/4-20               | 10-821484-2             |
| IO-360-B1E                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-2             |
| IO-360-B1E                    | 2     | -                             | 4300         | -            | 4300          | -             | 3/4-20               | 10-821404-2             |
| IO-360-B1F                    | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3   | 5/8-24               | 10-821481-2             |
| IO-360-B1F                    | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3   | 3/4-20               | 10-821484-2             |
| IO-360-B1F                    | 2     | -                             | 4300         | -            | 4300          | -             | 5/8-24               | 10-821401-2             |
| IO-360-B1F                    | 2     | -                             | 4300         | -            | 4300          | -             | 3/4-20               | 10-821404-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNES |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|---------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug       | Complete<br>Harness P/N |
| IO-360-B2E                    | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3 | 5/8-24              | 10-821481-2             |
| IO-360-B2E                    | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3 | 3/4-20              | 10-821484-2             |
| IO-360-B2E                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-2             |
| IO-360-B2E                    | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20              | 10-821404-2             |
| IO-360-B2F                    | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3 | 5/8-24              | 10-821481-2             |
| IO-360-B2F                    | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3 | 3/4-20              | 10-821484-2             |
| IO-360-B2F                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-2             |
| IO-360-B2F                    | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20              | 10-821404-2             |
| IO-360-B2F6                   | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3 | 5/8-24              | 10-821481-2             |
| IO-360-B2F6                   | -     | -                             | S4LN-1227    | 10-349365-3  | S4LN-1227     | 10-349365-3 | 3/4-20              | 10-821484-2             |
| IO-360-B2F6                   | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-2             |
| IO-360-B2F6                   | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20              | 10-821404-2             |
| IO-360-B4A                    | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-2             |
| IO-360-B4A                    | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-2             |
| IO-360-B4A                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-2             |
| IO-360-B4A                    | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20              | 10-821404-2             |
| IO-360-C1A                    | -     | -                             | S4LSC-200    | 10-600614-2  | S4LSC-204     | 10-600644-1 | 5/8-24              | 10-821471-16            |
| IO-360-C1A                    | -     | -                             | S4LSC-200    | 10-600614-2  | S4LSC-204     | 10-600644-1 | 3/4-20              | 10-821474-16            |
| IO-360-C1A                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-2             |
| IO-360-C1B                    | -     | -                             | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-2             |
| IO-360-C1B                    | -     | -                             | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1 | 3/4-20              | 10-821484-2             |
| IO-360-C1C                    | 38    | 10-400449                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-26            |
| IO-360-C1C                    | -     | 10-400447                     | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-26            |
| IO-360-C1C                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-26            |
| IO-360-C1C6                   | -     | 10-400447                     | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-26            |
| IO-360-C1C6                   | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-26            |
| IO-360-C1D6                   | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-2             |
| IO-360-C1D6                   | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20              | 10-821484-2             |
| IO-360-C1D6                   | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-2             |
| IO-360-C1D6                   | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 3/4-20              | 10-821484-2             |
| IO-360-C1E6                   | -     | 10-400449                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-26            |
| IO-360-C1E6                   | -     | 10-400447                     | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-26            |
| IO-360-C1E6                   | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-26            |
| IO-360-C1E6D                  | -     | 10-785124-106                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |             | 3/4-20              | 10-821414-6             |
| IO-360-C1E6D                  | -     | 10-785124-111                 | D4LN-3000    | 10-682555-13 | DUAL MAGNETO  |             | 3/4-20              | 10-821414-6             |
| IO-360-C1F                    | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-2             |
| IO-360-C1F                    | -     | -                             | S4LN-1227    | 10-349365-9  | S4LN-1209     | 10-349305-1 | 3/4-20              | 10-821484-2             |
| IO-360-D1A                    | -     | -                             | S4LN-1208    | 10-349285-1  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-24            |
| IO-360-D1A                    | -     | -                             | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1 | 5/8-24              | 10-821481-24            |
| IO-360-D1A                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24              | 10-821401-24            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|---------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No       | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| IO-360-E1A                    | -     | -                             | S4LN-1208    | 10-349285-1   | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-24            |
| IO-360-E1A                    | 2     | -                             | 4300         | -             | 4300          | -           | 5/8-24                 | 10-821401-24            |
| IO-360-F1A                    | -     | 10-400483                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| IO-360-F1A                    | -     | 10-400484                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| IO-360-F1A                    | 2     | -                             | 4300         | -             | 4300          | -           | 5/8-24                 | 10-821401-2             |
| IO-360-F1A                    | 2     | -                             | 4300         | -             | 4300          | -           | 3/4-20                 | 10-821404-2             |
| IO-360-J1A6D                  | -     | 10-785124-111                 | D4LN-3000    | 10-682555-13  | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-6             |
| IO-360-K2A                    | -     | -                             | S4LSC-21     | 10-500514-2   | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| IO-360-K2A                    | -     | -                             | S4LSC-21     | 10-500514-2   | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| IO-360-K2A                    | 2     | -                             | 4300         | -             | 4300          | -           | 5/8-24                 | 10-821401-16            |
| IVO-360-A1A                   | -     | -                             | S4LSC-200    | 10-600614-1   | S4LSC-200     | 10-600614-1 | 5/8-24                 | 10-821471-2             |
| IVO-360-A1A                   | -     | -                             | S4LSC-200    | 10-600614-1   | S4LSC-200     | 10-600614-1 | 3/4-20                 | 10-821474-2             |
| IVO-360-A1A                   | -     | 10-400465                     | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| IVO-360-A1A                   | -     | 10-400482                     | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| LIO-360-A1H6                  | -     | -                             | S4RN-1227    | 10-349365-6   | S4RN-1209     | 10-349305-3 | 5/8-24                 | 10-821481-2             |
| LIO-360-A1H6                  | -     | -                             | S4RN-1227    | 10-349365-6   | S4RN-1209     | 10-349305-3 | 3/4-20                 | 10-821484-2             |
| LIO-360-A1H6                  | 2     | -                             | 4300         | -             | 4300          | -           | 5/8-24                 | 10-821401-2             |
| LIO-360-A1H6                  | 2     | -                             | 4300         | -             | 4300          | -           | 3/4-20                 | 10-821404-2             |
| LIO-360-C1E6                  | -     | -                             | S4RN-1227    | 10-349365-6   | S4RN-1209     | 10-349305-3 | 5/8-24                 | 10-821481-26            |
| LIO-360-C1E6                  | -     | -                             | S4RN-1227    | 10-349365-10  | S4RN-1209     | 10-349305-3 | 5/8-24                 | 10-821481-26            |
| LIO-360-C1E6                  | 2     | -                             | 4300         | -             | 4300          | -           | 5/8-24                 | 10-821401-26            |
| LO-360-A1G6D                  | -     | 10-785124-112                 | D4RN-3000    | 10-682555-14  | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-6             |
| LO-360-A1G6D                  | -     | 10-785164-112                 | D4RN-3000    | 10-682555-141 | DUAL MAGNETO  |             | 3/4-20                 | 10-821444-6             |
| LO-360-E1A6D                  | -     | 10-785124-121                 | D4RN-3000    | 10-682555-15  | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-4             |
| LTO-360-E1A6D                 | -     | 10-785124-130                 | D4LN-3000    | 10-682555-13  | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-14            |
| O-360-A1A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A1A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A1A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-A1A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-A1A                     | 2     | -                             | 4300         | -             | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-A1A                     | 2     | -                             | 4300         | -             | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-360-A1AD                    | -     | 10-785124-106                 | D4LN-3000    | 10-682555-11  | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-6             |
| O-360-A1C                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A1C                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A1D                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A1D                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A1D                     | 2     | -                             | 4300         | -             | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-A1D                     | 2     | -                             | 4300         | -             | 4300          | -           | 3/4-20                 | 10-821404-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|---------------|---------------|---------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No       | Type          | Part No       | Spark<br>Plug          | Complete<br>Harness P/N |
| O-360-A1F                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| O-360-A1F                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| O-360-A1F                     | 3     | -                             | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-5   | 5/8-24                 | 10-821481-2             |
| O-360-A1F                     | 3     | -                             | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-5   | 3/4-20                 | 10-821484-2             |
| O-360-A1F                     | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-360-A1F                     | 2     | -                             | 4300         | -             | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-360-A1F6                    | -     | 10-400483                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| O-360-A1F6                    | -     | 10-400484                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| O-360-A1F6                    | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-360-A1F6                    | 2     | -                             | 4300         | -             | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-360-A1F6D                   | 41    | 10-785124-106                 | D4LN-3000    | 10-682555-11  | DUAL MAGNETO  |               | 3/4-20                 | 10-821414-6             |
| O-360-A1F6D                   | 42    | 10-785124-110                 | D4LN-3000    | 10-682555-11  | DUAL MAGNETO  |               | 3/4-20                 | 10-821414-8             |
| O-360-A1G                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| O-360-A1G                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| O-360-A1G                     | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-360-A1G                     | 2     | -                             | 4300         | -             | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-360-A1G6                    | -     | 10-400483                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 5/8-24                 | 10-821481-2             |
| O-360-A1G6                    | -     | 10-400484                     | S4LN-1227    | 10-349365-3   | S4LN-1209     | 10-349305-1   | 3/4-20                 | 10-821484-2             |
| O-360-A1G6                    | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-360-A1G6                    | 2     | -                             | 4300         | -             | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-360-A1G6D                   | -     | 10-785124-113                 | D4LN-3000    | 10-682555-15  | DUAL MAGNETO  |               | 3/4-20                 | 10-821414-6             |
| O-360-A1G6D                   | 3     | 10-785164-113                 | D4LN-3000    | 10-682555-151 | DUAL MAGNETO  |               | 3/4-20                 | 10-821444-6             |
| O-360-A1H                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-360-A1H                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| O-360-A1H                     | -     | -                             | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-360-A1H                     | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-360-A1LD                    | -     | 10-785124-106                 | D4LN-3000    | 10-682555-11  | DUAL MAGNETO  |               | 3/4-20                 | 10-821414-6             |
| O-360-A1LD                    | -     | 10-785124-110                 | D4LN-3000    | 10-682555-11  | DUAL MAGNETO  |               | 3/4-20                 | 10-821414-8             |
| O-350-A1N6                    | -     | 10-400450                     | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-2             |
| O-360-A1N6                    | -     | 10-400454                     | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-2             |
| O-360-A1N6                    | 44    | 10-400436                     | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-2             |
| O-360-A1N6                    | 44    | 10-400428                     | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-2             |
| O-350-A1N6                    | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-2             |
| O-360-A1N6                    | 2     | -                             | 4300         | -             | 4300          | -             | 3/4-20                 | 10-821404-2             |
| O-360-A2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-360-A2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| O-360-A2A                     | -     | -                             | S4LSC-21     | 10-500514-1   | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-360-A2A                     | -     | -                             | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1   | 5/8-24                 | 10-821471-16            |
| O-360-A2A                     | -     | -                             | S4LSC-21     | 10-500514-1   | S4LSC-21      | 10-500514-1   | 3/4-20                 | 10-821474-16            |
| O-360-A2A                     | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-16            |
| O-360-A2D                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1   | 5/8-24                 | 10-821471-16            |
| O-360-A2D                     | -     | -                             | S4LSC-200    | 10-600614-1   | S4LSC-204     | 10-600644-1   | 3/4-20                 | 10-821474-16            |
| O-360-A2D                     | 3     | -                             | S4LSC-200    | 10-600614-1   | S4LSC-204T    | 10-600644-201 | 5/8-24                 | 10-821471-16            |
| O-360-A2D                     | 3     | -                             | S4LSC-200    | 10-600614-1   | S4LSC-204T    | 10-600644-201 | 3/4-20                 | 10-821474-16            |
| O-360-A2D                     | 2     | -                             | 4300         | -             | 4300          | -             | 5/8-24                 | 10-821401-16            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| O-360-A2E                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A2E                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A2F                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-360-A2F                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-360-A2F                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-A2F                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-360-A2G                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-360-A2G                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-360-A2G                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-A2G                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-360-A2H                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A2H                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A2H                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-A2H                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-A3A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-360-A3A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-360-A3A                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-360-A3A                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-360-A3AD                    | -     | 10-785124-106                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-6             |
| O-360-A3D                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A3D                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A4A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-360-A4A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-360-A4A                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-360-A4A                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-360-A4AD                    | -     | 10-785124-106                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-6             |
| O-360-A4D                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A4D                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A4D                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-A4D                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-A4G                     | -     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24                 | 10-821481-2             |
| O-360-A4G                     | -     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20                 | 10-821484-2             |
| O-360-A4G                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-A4G                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-360-A4J                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-360-A4J                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-360-A4J                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-360-A4J                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-360-A4K                     | 14    | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-A4K                     | 14    | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-A4K                     | 14,44 | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-A4K                     | 14,44 | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-A4K                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-A4K                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| O-360-A4M                     | 15    | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-360-A4M                     | 15    | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-360-A4M                     | 15,44 | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-360-A4M                     | 15,44 | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-360-A4M                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-360-A4M                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-360-A4N                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-360-A4N                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-360-A4N                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-360-A4N                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-360-A4N                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-360-A4N                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-360-A5AD                    | -     | 10-785124-106                 | D4LN-3000    | 10-682555-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821414-6             |
| O-360-B1A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-360-B1A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-360-B1A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-360-B1A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-360-B1B                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-360-B1B                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-360-B2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-360-B2A                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-360-B2A                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-360-B2B                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-360-B2B                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-360-C1A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-360-C1A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-16            |
| O-360-C1A                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-360-C1A                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-360-C1C                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-16            |
| O-360-C1C                     | -     | -                             | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-16            |
| O-360-C1C                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-16            |
| O-360-C1E                     | 16    | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| O-360-C1E                     | 16    | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| O-360-C1E                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-360-C1E                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-360-C1E                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-360-C1E                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20               | 10-821404-2             |
| O-360-C1F                     | 1     | 10-400483                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 5/8-24               | 10-821481-2             |
| O-360-C1F                     | 1     | 10-400484                     | S4LN-1227    | 10-349365-3  | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-2             |
| O-360-C1F                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-360-C1F                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20               | 10-821404-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness P/N |
| O-360-C1G                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-C1G                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-C1G                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-C1G                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-C1G                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-C1G                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-360-C2A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-C2A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-C2A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-C2A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-C2A                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-C2A                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-360-C2B                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-C2B                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-C2B                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-C2B                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-C2C                     | -     | 10-400427                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-360-C2C                     | -     | -                             | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-360-C2C                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-360-C2D                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-C2D                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-C2E                     | 17    | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-C2E                     | 17    | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-C2E                     | 17,44 | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-C2E                     | 17,44 | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-C2E                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-C2E                     | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |
| O-360-D1A                     | -     | 10-400450                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-D1A                     | -     | 10-400454                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-D1A                     | 44    | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-D1A                     | 44    | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-D2A                     | -     | 10-400440                     | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-16            |
| O-360-D2A                     | 44    | 10-400434                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-16            |
| O-360-D2A                     | -     | -                             | S4LSC-21     | 10-500514-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-16            |
| O-360-D2A                     | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-16            |
| O-360-D2B                     | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24                 | 10-821471-2             |
| O-360-D2B                     | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20                 | 10-821474-2             |
| O-360-E1A6D                   | -     | 10-785124-115                 | D4RN-3000    | 10-682555-14 | DUAL MAGNETO  |             | 3/4-20                 | 10-821414-4             |
| O-360-F1A6                    | 1     | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24                 | 10-821471-2             |
| O-360-F1A6                    | 1     | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20                 | 10-821474-2             |
| O-360-F1A6                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24                 | 10-821401-2             |
| O-360-F1A6                    | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20                 | 10-821404-2             |



| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| O-360-G1A6                    | 1     | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| O-360-G1A6                    | 1     | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| O-360-G1A6                    | 2     | -                             | 4300         | -            | 4300          | -           | 5/8-24               | 10-821401-2             |
| O-360-G1A6                    | 2     | -                             | 4300         | -            | 4300          | -           | 3/4-20               | 10-821404-2             |
| TIO-360-A1A                   | -     | -                             | S4LN-1208    | 10-349285-1  | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-14            |
| TIO-360-A1B                   | -     | -                             | S4LN-1208    | 10-349285-7  | S4LN-1209     | 10-349305-1 | 3/4-20               | 10-821484-14            |
| TIO-360-C1A6D                 | -     | 10-785124-118                 | D4LN-3000    | 10-682555-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821414-10            |
| TO-360-A1A6D                  | -     | 10-785124-111                 | D4LN-3000    | 10-682555-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821414-6             |
| TO-360-C1A6D                  | -     | 10-785124-111                 | D4LN-3000    | 10-682555-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821414-6             |
| TO-360-E1A6D                  | -     | 10-785124-129                 | D4RN-3000    | 10-682555-16 | DUAL MAGNETO  |             | 3/4-20               | 10-821414-14            |
| TO-360-F1A6D                  | -     | 10-785124-118                 | D4LN-3000    | 10-682555-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821414-10            |
| VO-360-A1A                    | -     | 10-400436                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 5/8-24               | 10-821471-2             |
| VO-360-A1A                    | -     | 10-400428                     | S4LSC-21     | 10-500514-1  | S4LSC-21      | 10-500514-1 | 3/4-20               | 10-821474-2             |
| VO-360-A1B                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| VO-360-A1B                    | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| VO-360-B1A                    | -     | 10-400465                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 5/8-24               | 10-821471-2             |
| VO-360-B1A                    | -     | 10-400482                     | S4LSC-200    | 10-600614-1  | S4LSC-204     | 10-600644-1 | 3/4-20               | 10-821474-2             |
| GO-435-C2A                    | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-C2A                    | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-435-C2A2                   | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-C2A2                   | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-435-C2B                    | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-C2B                    | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-435-C2B1                   | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-C2B1                   | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-435-C2B2                   | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-C2B2                   | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-435-C2B26                  | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-C2B26                  | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-435-C2E                    | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-C2E                    | -     | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-435-D1                     | 18    | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-435-D1                     | 18    | -                             | S6LSC-21     | 10-500516-3  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| O-435-6                       | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-18            |
| O-435-6A                      | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-18            |
| O-435-6A                      | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-18            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM |     | LEFT MAGNETO |             | RIGHT MAGNETO |              | GOLD SEAL<br>HARNES |                         |
|-------------------------------|-------|--------------------|-----|--------------|-------------|---------------|--------------|---------------------|-------------------------|
|                               |       | Kit                | P/N | Type         | Part No     | Type          | Part No      | Spark<br>Plug       | Complete<br>Harness P/N |
| O-435-23                      | -     | -                  |     | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| O-435-23A                     | -     | -                  |     | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| O-435-23B                     | -     | -                  |     | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| O-435-25                      | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| O-435-25A                     | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| O-435-A                       | 28    | -                  |     | SCLSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| O-435-A2                      | 28    | -                  |     | SCLSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| O-435-C                       | 28    | -                  |     | SCLSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| O-435-C1                      | 28    | -                  |     | SCLSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| O-435-C2                      | 28    | -                  |     | SCLSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| O-435-K1                      | 28    | -                  |     | SCLSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| TVO-435-A1A                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| TVO-435-A1A                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 3/4-20              | 10-821675-18            |
| TVO-435-B1A                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| TVO-435-B1A                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 3/4-20              | 10-821675-18            |
| TVO-435-B1B                   | -     | -                  |     | S6RN-1208    | 10-349290-4 | S6LN-1209     | 10-349310-10 | 3/4-20              | 10-821685-18            |
| TVO-435-C1A                   | 25    | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| TVO-435-D1A                   | -     | -                  |     | S6RN-1208    | 10-349290-4 | S6LN-1209     | 10-349310-10 | 3/4-20              | 10-821685-18            |
| TVO-435-D1B                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| TVO-435-D1B                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 3/4-20              | 10-821675-18            |
| TVO-435-E1A                   | 25    | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | -                   | -                       |
| TVO-435-F1A                   | -     | -                  |     | S6RN-1208    | 10-349290-4 | S6LN-1209     | 10-349310-10 | 3/4-20              | 10-821685-18            |
| TVO-435-G1A                   | -     | -                  |     | S6RN-1208    | 10-349290-4 | S6LN-1209     | 10-349310-10 | 3/4-20              | 10-821685-18            |
| TVO-435-G1B                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| TVO-435-G1B                   | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 3/4-20              | 10-821675-18            |
| VO-435-A1B                    | -     | -                  |     | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| VO-435-A1C                    | 29    | -                  |     | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| VO-435-A1D                    | 29    | -                  |     | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| VO-435-A1D                    | 29    | -                  |     | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 3/4-20              | 10-821675-18            |
| VO-435-A1E                    | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24              | 10-821672-18            |
| VO-435-A1E                    | -     | -                  |     | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 3/4-20              | 10-821675-18            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |              | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|--------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No      | Spark<br>Plug        | Complete<br>Harness P/N |
| VO-435-A1F                    | -     | -                             | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821672-18            |
| VO-435-A1F                    | -     | -                             | S6RSC-200    | 10-600616-7 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-18            |
| VO-435-B1A                    | -     | -                             | S6LN-1208    | 10-349290-9 | S6RN-1209     | 10-349310-11 | 3/4-20               | 10-821684-26            |
| GO-480-B                      | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-B                      | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-B1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-B1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-B1B                    | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-B1B                    | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-B1C                    | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-B1C                    | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-B1D                    | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-B1D                    | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-C1B6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-C1B6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-C1D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-C1D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-C2C6                   | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-C2C6                   | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-C2D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-C2D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-C2E6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-C2E6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-D1A                    | -     | -                             | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821672-24            |
| GO-480-E1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-E1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-F1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-F1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-F2A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-F2A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-F2D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-F2D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-F3A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-F3A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |
| GO-480-F3B6                   | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 5/8-24               | 10-821671-32            |
| GO-480-F3B6                   | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2  | 3/4-20               | 10-821675-32            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| GO-480-F4A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-F4A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-480-F4B6                   | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-F4B6                   | 18    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-480-F6                     | 19    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-F6                     | 19    | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-480-G1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-G1A6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-480-G1B6                   | -     | -                             | S6RSC-21     | 10-500516-5 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GO-480-G1D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-G1D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-480-G1H6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-G1H6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-480-G1J6                   | -     | -                             | S6LN-1227    | 10-349370-1 | S6LN-1209     | 10349310-2  | 3/4-20               | 10-821684-30            |
| GO-480-G2D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-G2D6                   | -     | -                             | S6LSC-21     | 10-500516-3 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GO-480-G2F6                   | -     | -                             | S6LSC-200    | 10-600616-5 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821671-32            |
| GO-480-G2F6                   | -     | -                             | S6LSC-200    | 10-600616-5 | S6LSC-204     | 10-600646-2 | 3/4-20               | 10-821675-32            |
| GSO-480-A1A6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-A1C6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-A2A6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1A6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1B3                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1B6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1C6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1E6                  | -     | -                             | S6RSC-200    | 10-600616-4 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1F6                  | -     | -                             | S6RSC-200    | 10-600616-4 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1G6                  | -     | -                             | S6RSC-200    | 10-600616-4 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B1J6                  | -     | -                             | S6RN-1227    | 10-349370-2 | S6LN-1209     | 10-349310-2 | 3/4-20               | 10-821684-28            |
| GSO-480-B2C6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B2D6                  | -     | -                             | S6RSC-21     | 10-500516-5 | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| GSO-480-B2G6                  | -     | -                             | S6RSC-200    | 10-600616-4 | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|---------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No       | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| GSO-480-B2H6                  | -     | -                             | S6RSC-200    | 10-600616-4   | S6LSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| IGO-480-A1A6                  | 25    | -                             | S6LN-1227    | 10-349370-1   | S6LN-1209     | 10-349310-1 | -                    | -                       |
| IGO-480-A1B6                  | 25    | -                             | S6LSC-21     | 10-500516-3   | S6LSC-204     | 10-600646-2 | -                    | -                       |
| IGSO-480-A1A6                 | 25    | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2 | -                    | -                       |
| IGSO-480-A1B6                 | 25    | -                             | S6RSC-200    | 10-600616-4   | S6LSC-204     | 10-600646-2 | -                    | -                       |
| IGSO-480-A1C6                 | 25    | -                             | S6LN-1227    | 10-349370-1   | S6LN-1209     | 10-349310-1 | -                    | -                       |
| IGSO-480-A1D6                 | 25    | -                             | S6LN-1227    | 10-349370-1   | S6LN-1209     | 10-349310-1 | -                    | -                       |
| IGSO-480-A1E6                 | 25    | -                             | S6LSC-21     | 10-500516-3   | S6LSC-204     | 10-600646-2 | -                    | -                       |
| IGSO-480-A1F3                 | 25    | -                             | S6LSC-21     | 10-500516-3   | S6LSC-204     | 10-600646-2 | -                    | -                       |
| IGSO-480-A1F6                 | 25    | -                             | S6LSC-21     | 10-500516-3   | S6LSC-204     | 10-600646-2 | -                    | -                       |
| O-480-1                       | 25    | -                             | S6LN-1227    | 10-349370-1   | S6LN-1209     | 10-349310-1 | -                    | -                       |
| O-480-1A                      | 25    | -                             | S6LN-1227    | 10-349370-1   | S6LN-1209     | 10-349310-1 | -                    | -                       |
| O-480-3                       | -     | -                             | S6RSC-21     | 10-500516-5   | S6RSC-204     | 10-600646-2 | 5/8-24               | 10-821672-24            |
| AEIO-540-D4A5                 | -     | 10-400472                     | S6LSC-200    | 10-600616-3   | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| AEIO-540-D4A5                 | -     | -                             | S6LSC-200    | 10-600616-3   | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| AEIO-540-D4A5                 | 2     | -                             | 6300         | -             | 6300          | -           | 5/8-24               | 10-821601-2             |
| AEIO-540-D4A5                 | 2     | -                             | 6300         | -             | 6300          | -           | 3/4-20               | 10-821604-2             |
| AEIO-540-D4B5                 | -     | 10-400499                     | S6LN-1227    | 10-349370-4   | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| AEIO-540-D4B5                 | 3     | -                             | S6LN-1227    | 10-349370-4   | S6LN-1209     | 10-349310-8 | 5/8-24               | 10-821681-40            |
| AEIO-540-D4B5                 | 2     | -                             | 6300         | -             | 6300          | -           | 5/8-24               | 10-821601-38            |
| AEIO-540-L1B5D                | -     | 10-785126-107                 | D6LN-3000    | 10-682560-13  | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| AEIO-540-L1B5D                | 3     | 10-785166-107                 | D6LN-3000    | 10-682560-131 | DUAL MAGNETO  |             | 3/4-20               | 10-821644-6             |
| HIO-540-A1A                   | -     | -                             | S6LN-1227    | 10-349370-4   | S6LN-1209     | 10-349310-1 | -                    | -                       |
| IGO-540-A1A                   | -     | -                             | S6RSC-200    | 10-600616-4   | S6RN-204      | 10-600646-4 | 3/4-20               | 10-821674-22            |
| IGO-540-A1B                   | 21    | -                             | S6RSC-200    | 10-600616-4   | S6RN-204      | 10-600646-4 | 3/4-20               | 10-821674-22            |
| IGO-540-A1C                   | -     | -                             | S6RN-1208    | 10-349290-3   | S6RN-1209     | 10-349310-4 | 3/4-20               | 10-821685-10            |
| IGO-540-B1A                   | -     | -                             | S6RSC-200    | 10-600616-4   | S6RN-204      | 10-600646-4 | 3/4-20               | 10-821674-22            |
| IGO-540-B1B                   | 22    | -                             | S6RSC-200    | 10-600616-4   | S6RN-204      | 10-600646-4 | 3/4-20               | 10-821674-22            |
| IGO-540-B1C                   | -     | -                             | S6RSC-200    | 10-600616-4   | S6RN-204      | 10-600646-4 | 3/4-20               | 10-821674-22            |
| IGSO-540-A1A                  | 23    | -                             | S6RN-1208    | 10-349290-3   | S6RN-1209     | 10-349310-4 | 3/4-20               | 10-821685-10            |
| IGSO-540-A1C                  | 20    | -                             | S6RN-1208    | 10-349290-3   | S6RN-1209     | 10-349310-4 | 3/4-20               | 10-821685-10            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESSES |                     |     |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|------------------------|---------------------|-----|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug          | Complete<br>Harness | P/N |
| IGSO-540-A1D                  | -     | -                             | S6RN-1208    | 10-349290-3  | S6RN-1209     | 10-349310-4 | 3/4-20                 | 10-821685-10        |     |
| IGSO-540-A1E                  | -     | -                             | S6RN-1208    | 10-349290-3  | S6RN-1209     | 10-349310-4 | 3/4-20                 | 10-821685-10        |     |
| IGSO-540-A1F                  | -     | -                             | S6RN-1208    | 10-349290-3  | S6RN-1209     | 10-349310-4 | 3/4-20                 | 10-821685-10        |     |
| IGSO-540-A1H                  | -     | -                             | S6RN-1208    | 10-349290-3  | S6RN-1209     | 10-349310-4 | 3/4-20                 | 10-821685-10        |     |
| IGSO-540-B1A                  | 24    | -                             | S6RN-1208    | 10-349290-3  | S6RN-1209     | 10-349310-4 | 3/4-20                 | 10-821685-16        |     |
| IGSO-540-B1C                  | -     | -                             | S6RN-1208    | 10-349290-3  | S6RN-1209     | 10-349310-4 | 3/4-20                 | 10-821685-16        |     |
| IO-540-A1A5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-A1A5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-A1A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24                 | 10-821601-2         |     |
| IO-540-A1A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20                 | 10-821604-2         |     |
| IO-540-B1A5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-B1A5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-B1A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24                 | 10-821601-2         |     |
| IO-540-B1A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20                 | 10-821604-2         |     |
| IO-540-B1B5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-B1B5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-B1C5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-B1C5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-C1B5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-C1B5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-C1B5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24                 | 10-821601-2         |     |
| IO-540-C1B5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20                 | 10-821604-2         |     |
| IO-540-C1C5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-C1C5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-C1C5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24                 | 10-821601-2         |     |
| IO-540-C1C5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20                 | 10-821604-2         |     |
| IO-540-C2C                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-C2C                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-C2C                    | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24                 | 10-821601-2         |     |
| IO-540-C2C                    | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20                 | 10-821604-2         |     |
| IO-540-C4B5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-C4B5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-C4B5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24                 | 10-821601-2         |     |
| IO-540-C4B5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20                 | 10-821604-2         |     |
| IO-540-C4D5D                  | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20                 | 10-821614-6         |     |
| IO-540-D4A5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24                 | 10-821671-2         |     |
| IO-540-D4A5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20                 | 10-821674-2         |     |
| IO-540-D4A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24                 | 10-821601-2         |     |
| IO-540-D4A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20                 | 10-821604-2         |     |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNES |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|---------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug       | Complete<br>Harness P/N |
| IO-540-D4B5                   | -     | 10-400497                     | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-1 | 5/8-24              | 10-821681-38            |
| IO-540-D4B5                   | -     | 10-400495                     | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-38            |
| IO-540-D4B5                   | -     | -                             | S6LN-1227    | 10-349370-4 | S6LN-1227     | 10-349370-4 | 5/8-24              | 10-821681-38            |
| IO-540-D4B5                   | -     | -                             | S6LN-1227    | 10-349370-4 | S6LN-1227     | 10-349370-4 | 3/4-20              | 10-821684-38            |
| IO-540-D4B5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821601-38            |
| IO-540-D4B5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-38            |
| IO-540-D4C5                   | -     | 10-400445                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 5/8-24              | 10-821681-38            |
| IO-540-D4C5                   | -     | 10-400446                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-38            |
| IO-540-D4C5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821601-38            |
| IO-540-D4C5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-38            |
| IO-540-E1A5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 5/8-24              | 10-821671-2             |
| IO-540-E1A5                   | -     | -                             | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 3/4-20              | 10-821674-2             |
| IO-540-E1A5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821601-2             |
| IO-540-E1A5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-2             |
| IO-540-E1B5                   | -     | 10-400496                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 5/8-24              | 10-821681-40            |
| IO-540-E1B5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-40            |
| IO-540-E1B5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821601-40            |
| IO-540-E1B5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-40            |
| IO-540-E1C5                   | -     | 10-400496                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 5/8-24              | 10-821681-40            |
| IO-540-E1C5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-40            |
| IO-540-G1A5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 5/8-24              | 10-821671-2             |
| IO-540-G1A5                   | -     | -                             | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 3/4-20              | 10-821674-2             |
| IO-540-G1A5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821601-2             |
| IO-540-G1A5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-2             |
| IO-540-G1B5                   | -     | 10-400496                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 5/8-24              | 10-821681-40            |
| IO-540-G1B5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-40            |
| IO-540-G1B5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821601-40            |
| IO-540-G1B5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-40            |
| IO-540-G1C5                   | -     | 10-400497                     | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-1 | 5/8-24              | 10-821681-38            |
| IO-540-G1C5                   | -     | 10-400495                     | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-38            |
| IO-540-G1C5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821604-38            |
| IO-540-G1C5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821601-38            |
| IO-540-G1D5                   | -     | 10-400444                     | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-40            |
| IO-540-G1D5                   | 3     | -                             | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-8 | 3/4-20              | 10-821684-40            |
| IO-540-G1D5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-40            |
| IO-540-G1E5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821684-40            |
| IO-540-G1E5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-40            |
| IO-540-G1F5                   | -     | -                             | S6LN-1227    | 10-349370-4 | S6LN-1227     | 10-349370-4 | 3/4-20              | 10-821684-40            |
| IO-540-G1F5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-40            |
| IO-540-J4A5                   | -     | 10-400445                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 5/8-24              | 10-821681-38            |
| IO-540-J4A5                   | -     | 10-400446                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 3/4-20              | 10-821681-38            |
| IO-540-J4A5                   | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24              | 10-821601-38            |
| IO-540-J4A5                   | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20              | 10-821604-38            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| IO-540-K1A5                   | -     | 10-400499                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| IO-540-K1A5                   | -     | 10-400444                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| IO-540-K1A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-40            |
| IO-540-K1A5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20               | 10-821604-40            |
| IO-540-K1A5D                  | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| IO-540-K1A5D                  | -     | 10-785126-107                 | D6LN-3000    | 10-682560-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821644-6             |
| IO-540-K1B5                   | -     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1227     | 10-349370-4 | 5/8-24               | 10-821681-40            |
| IO-540-K1B5                   | -     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1227     | 10-349370-4 | 3/4-20               | 10-821684-40            |
| IO-540-K1B5                   | -     | 10-400499                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| IO-540-K1B5                   | -     | 10-400444                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| IO-540-K1B5                   | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349370-8 | 5/8-24               | 10-821681-40            |
| IO-540-K1B5                   | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349370-8 | 3/4-20               | 10-821684-40            |
| IO-540-K1B5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-40            |
| IO-540-K1B5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20               | 10-821604-40            |
| IO-540-K1C5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| IO-540-K1C5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| IO-540-K1C5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-2             |
| IO-540-K1C5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20               | 10-821604-2             |
| IO-540-K1D5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| IO-540-K1D5                   | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| IO-540-K1D5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-2             |
| IO-540-K1D5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20               | 10-821604-2             |
| IO-540-K1E5                   | -     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1227     | 10-349370-4 | 5/8-24               | 10-821681-40            |
| IO-540-K1E5                   | -     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1227     | 10-349370-4 | 3/4-20               | 10-821684-40            |
| IO-540-K1E5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-40            |
| IO-540-K1E5                   | 2     | -                             | 6300         | -            | 6300          | -           | 3/4-20               | 10-821604-40            |
| IO-540-K1E5D                  | -     | 10-785126-107                 | D6LN-3000    | 10-682560-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821644-6             |
| IO-540-K1F5                   | -     | 10-400496                     | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| IO-540-K1F5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| IO-540-K1F5D                  | -     | 10-785146-111                 | D6LN-3000    | 10-682610-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821624-6             |
| IO-540-K1G5                   | -     | 10-400499                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| IO-540-K1G5                   | -     | 10-400444                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| IO-540-K1G5D                  | -     | 10-785126-107                 | D6LN-3000    | 10-682560-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821644-6             |
| IO-540-K1H5                   | -     | 10-400499                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| IO-540-K1H5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-40            |
| IO-540-K1J5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| IO-540-K1J5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-40            |
| IO-540-K1J5D                  | -     | 10-785146-111                 | D6LN-3000    | 10-682610-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821624-6             |
| IO-540-K1K5                   | -     | 10-400499                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| IO-540-K1K5                   | 2     | -                             | 6300         | -            | 6300          | -           | 5/8-24               | 10-821601-40            |



| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |              | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|---------------|---------------|--------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No       | Type          | Part No      | Spark<br>Plug          | Complete<br>Harness P/N |
| IO-540-L1A5                   | -     | 10-400497                     | S6LN-1227    | 10-349370-4   | S6LN-1209     | 10-349310-1  | 5/8-24                 | 10-821681-38            |
| IO-540-L1A5                   | 2     | -                             | 6300         | -             | 6300          | -            | 5/8-24                 | 10-821601-38            |
| IO-540-L1A5D                  | -     | 10-785126-107                 | D6LN-3000    | 10-682560-13  | DUAL MAGNETO  |              | 3/4-20                 | 10-821644-6             |
| IO-540-L1B5D                  | -     | 10-785126-107                 | D6LN-3000    | 10-682560-13  | DUAL MAGNETO  |              | 3/4-20                 | 10-821644-6             |
| IO-540-L1C5                   | -     | 10-400499                     | S6LN-1227    | 10-349370-4   | S6LN-1209     | 10-349310-1  | 5/8-24                 | 10-821681-40            |
| IO-540-L1C5                   | 2     | -                             | 6300         | -             | 6300          | -            | 5/8-24                 | 10-821601-40            |
| IO-540-M1A5                   | -     | -                             | S6LN-1208    | 10-349290-1   | S6LN-1209     | 10-349310-1  | 3/4-20                 | 10-821685-12            |
| IO-540-M1B5D                  | -     | 10-785126-109                 | D6LN-3000    | 10-682560-13  | DUAL MAGNETO  |              | 3/4-20                 | 10-821615-4             |
| IO-540-M2A5D                  | -     | 10-785186-109                 | D6LN-3200    | 10-682610-131 | DUAL MAGNETO  |              | 3/4-20                 | 10-821635-4             |
| IO-540-N1A5                   | -     | 10-400472                     | S6LSC-200    | 10-600616-3   | S6LSC-204     | 10-600646-1  | 5/8-24                 | 10-821671-2             |
| IO-540-N1A5                   | -     | -                             | S6LSC-200    | 10-600616-3   | S6LSC-204     | 10-600646-1  | 3/4-20                 | 10-821674-2             |
| IO-540-N1A5                   | 2     | -                             | 6300         | -             | 6300          | -            | 5/8-24                 | 10-821601-2             |
| IO-540-N1A5                   | 2     | -                             | 6300         | -             | 6300          | -            | 3/4-20                 | 10-821604-2             |
| IO-540-N1A5D                  | -     | 10-785146-106                 | D6LN-3200    | 10-682610-11  | DUAL MAGNETO  |              | 3/4-20                 | 10-821624-6             |
| IO-540-P1A5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1   | S6LN-1209     | 10-349310-1  | 3/4-20                 | 10-821684-40            |
| IO-540-P1A5                   | 2     | -                             | 6300         | -             | 6300          | -            | 5/8-24                 | 10-821601-40            |
| IO-540-R1A5                   | -     | 10-400496                     | S6LN-1208    | 10-349290-1   | S6LN-1209     | 10-349310-1  | 5/8-24                 | 10-821681-40            |
| IO-540-R1A5                   | 2     | -                             | 6300         | -             | 6300          | -            | 5/8-24                 | 10-821601-40            |
| IO-540-S1A5                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1   | S6LN-1209     | 10-349310-1  | 3/4-20                 | 10-821684-40            |
| IO-540-S1A5                   | 3     | -                             | S6LN-1208    | 10-349290-1   | S6LN-1209     | 10-349310-8  | 3/4-20                 | 10-821684-40            |
| IO-540-S1A5                   | 2     | -                             | 6300         | -             | 6300          | -            | 5/8-24                 | 10-821601-40            |
| IO-540-T4A5D                  | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11  | DUAL MAGNETO  |              | 3/4-20                 | 10-821614-6             |
| IO-540-T4B5D                  | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11  | DUAL MAGNETO  |              | 3/4-20                 | 10-821614-6             |
| IO-540-T4C5D                  | -     | 10-785146-106                 | D6LN-3200    | 10-682610-11  | DUAL MAGNETO  |              | 3/4-20                 | 10-821624-6             |
| IO-540-U1A5D                  | -     | 10-785126-109                 | D6LN-3000    | 10-682560-13  | DUAL MAGNETO  |              | 3/4-20                 | 10-821615-4             |
| IO-540-V4A5D                  | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11  | DUAL MAGNETO  |              | 3/4-20                 | 10-821614-6             |
| IO-540-W1A5D                  | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11  | DUAL MAGNETO  |              | 3/4-20                 | 10-821614-6             |
| IO-540-W3A5D                  | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11  | DUAL MAGNETO  |              | 3/4-20                 | 10-821614-6             |
| IO-540-AA1A5                  | -     | 10-400498                     | S6LN-1208    | 10-349290-1   | S6LN-1209     | 10-349310-1  | 3/4-20                 | 10-821684-40            |
| IO-540-AA1A5                  | 2     | -                             | 6300         | -             | 6300          | -            | 5/8-24                 | 10-821601-40            |
| I VO-540-A1A                  | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18            |
| I VO-540-A1A                  | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18            |
| LTIO-540-F2BD                 | -     | 10-785046-110                 | D6RN-3200    | 10-682910-18  | DUAL MAGNETO  |              | 3/4-20                 | 10-821625-4             |
| LTIO-540-J2B                  | -     | -                             | S6RN-1208    | 10-349290-17  | S6RN-1209     | 10-349310-14 | 3/4-20                 | 10-821685-12            |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |              | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|--------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No      | Spark<br>Plug        | Complete<br>Harness P/N |
| LTIO-540-J2BD                 | -     | 10-785046-110                 | D6RN-3200    | 10-682910-18 | DUAL MAGNETO  |              | 3/4-20               | 10-821625-4             |
| LTIO-540-N2BD                 | -     | 10-785046-110                 | D6RN-3200    | 10-682910-18 | DUAL MAGNETO  |              | 3/4-20               | 10-821625-4             |
| LTIO-540-R2AD                 | -     | 10-785046-110                 | D6RN-3200    | 10-682910-18 | DUAL MAGNETO  |              | 3/4-20               | 10-821625-4             |
| LTIO-540-U2A                  | 29    | 10-349610-3                   | S6RN-1258    | 10-349490-3  | S6RN-1259     | 10-349510-3  | 3/4-20               | 10-821695-40            |
| LTIO-540-U2A                  | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-40            |
| LTIO-540-V2AD                 | -     | 10-785046-119                 | D6RN-3200    | 10-682910-18 | DUAL MAGNETO  |              | 3/4-20               | 10-821625-34            |
| LTIO-540-W2A                  | -     | -                             | S6RN-1208    | 10-349290-17 | S6RN-1209     | 10-349310-14 | 3/4-20               | 10-821684-2             |
| LTIO-540-W2A                  | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |
| O-540-9                       | 25    | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | -                    | -                       |
| O-540-9A                      | 25    | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | -                    | -                       |
| O-540-A1A                     | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 5/8-24               | 10-821671-2             |
| O-540-A1A                     | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 3/4-20               | 10-821674-2             |
| O-540-A1A                     | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-2             |
| O-540-A1A                     | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |
| O-540-A1A5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 5/8-24               | 10-821671-2             |
| O-540-A1A5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 3/4-20               | 10-821674-2             |
| O-540-A1A5                    | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-2             |
| O-540-A1A5                    | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |
| O-540-A1B5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 5/8-24               | 10-821671-2             |
| O-540-A1B5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 3/4-20               | 10-821674-2             |
| O-540-A1B5                    | -     | -                             | S6LSC-21     | 10-500516-2  | S6LSC-21      | 10-500516-2  | 5/8-24               | 10-821671-2             |
| O-540-A1B5                    | -     | -                             | S6LSC-21     | 10-500516-2  | S6LSC-21      | 10-500516-2  | 3/4-20               | 10-821674-2             |
| O-540-A1B5                    | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-2             |
| O-540-A1B5                    | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |
| O-540-A1C5                    | -     | -                             | S6LSC-21     | 10-500516-2  | S6LSC-21      | 10-500516-2  | 5/8-24               | 10-821671-2             |
| O-540-A1C5                    | -     | -                             | S6LSC-21     | 10-500516-2  | S6LSC-21      | 10-500516-2  | 3/4-20               | 10-821674-2             |
| O-540-A1C5                    | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-2             |
| O-540-A1C5                    | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |
| O-540-A1D                     | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1  | 5/8-24               | 10-821671-2             |
| O-540-A1D                     | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1  | 3/4-20               | 10-821674-2             |
| O-540-A1D                     | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-2             |
| O-540-A1D                     | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |
| O-540-A1D5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1  | 5/8-24               | 10-821671-2             |
| O-540-A1D5                    | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1  | 3/4-20               | 10-821674-2             |
| O-540-A1D5                    | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-2             |
| O-540-A1D5                    | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |
| O-540-A2B                     | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 5/8-24               | 10-821671-2             |
| O-540-A2B                     | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1  | 3/4-20               | 10-821674-2             |
| O-540-A2B                     | 2     | -                             | 6300         | -            | 6300          | -            | 5/8-24               | 10-821601-2             |
| O-540-A2B                     | 2     | -                             | 6300         | -            | 6300          | -            | 3/4-20               | 10-821604-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |             | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|-------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No     | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| O-540-A3D5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-A3D5                    | -     | -                             | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| O-540-A3D5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-2             |
| O-540-A3D5                    | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-821604-2             |
| O-540-A4A5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-A4A5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| O-540-A4A5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-2             |
| O-540-A4A5                    | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-821604-2             |
| O-540-A4B5                    | -     | -                             | S6LSC-21     | 10-500516-2 | S6LSC-21      | 10-500516-2 | 5/8-24               | 10-821671-2             |
| O-540-A4B5                    | -     | -                             | S6LSC-21     | 10-500516-2 | S6LSC-21      | 10-500516-2 | 3/4-20               | 10-821674-2             |
| O-540-A4B5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-2             |
| O-540-A4B5                    | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-821604-2             |
| O-540-A4C5                    | -     | -                             | S6LSC-21     | 10-500516-2 | S6LSC-21      | 10-500516-2 | 5/8-24               | 10-821671-2             |
| O-540-A4C5                    | -     | -                             | S6LSC-21     | 10-500516-2 | S6LSC-21      | 10-500516-2 | 3/4-20               | 10-821674-2             |
| O-540-A4D5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-A4D5                    | -     | -                             | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| O-540-A4D5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-2             |
| O-540-A4D5                    | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-821604-2             |
| O-540-B1A5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-B1A5                    | -     | -                             | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| O-540-B1A5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-2             |
| O-540-B1A5                    | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-821604-2             |
| O-540-B1B5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-B1B5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| O-540-B1D5                    | -     | 10-400496                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| O-540-B1D5                    | -     | 10-400498                     | S6LN-1208    | 10-349290-1 | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| O-540-B1D5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-40            |
| O-540-B1D5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-40            |
| O-540-B2A5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-B2A5                    | -     | -                             | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| O-540-B2A5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-2             |
| O-540-B2A5                    | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-821604-2             |
| O-540-B2B5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-B2B5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |
| O-540-B2B5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-2             |
| O-540-B2B5                    | 2     | -                             | 6300         | -           | 6300          | -           | 3/4-20               | 10-821604-2             |
| O-540-B2C5                    | -     | 10-400499                     | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| O-540-B2C5                    | -     | 10-400444                     | S6LN-1227    | 10-349370-4 | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| O-540-B2C5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-40            |
| O-540-B2C5                    | 2     | -                             | 6300         | -           | 6300          | -           | 5/8-24               | 10-821601-40            |
| O-540-B4A5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 5/8-24               | 10-821671-2             |
| O-540-B4A5                    | -     | -                             | S6LSC-200    | 10-600616-3 | S6LSC-204     | 10-600646-1 | 3/4-20               | 10-821674-2             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|---------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No       | Spark<br>Plug          | Complete<br>Harness P/N |
| O-540-B4B5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 5/8-24                 | 10-821671-2             |
| O-540-B4B5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 3/4-20                 | 10-821674-2             |
| O-540-B4B5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821601-2             |
| O-540-B4B5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821604-2             |
| O-540-D1A5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1   | 5/8-24                 | 10-821671-2             |
| O-540-D1A5                    | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1   | 3/4-20                 | 10-821674-2             |
| O-540-E4A5                    | -     | 10-400472                     | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1   | 5/8-24                 | 10-821671-2             |
| O-540-E4A5                    | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204     | 10-600646-1   | 3/4-20                 | 10-821674-2             |
| O-540-E4A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821601-2             |
| O-540-E4A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821604-2             |
| O-540-E4B5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 5/8-24                 | 10-821671-2             |
| O-540-E4B5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 3/4-20                 | 10-821674-2             |
| O-540-E4B5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821601-2             |
| O-540-E4B5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821604-2             |
| O-540-E4C5                    | -     | 10-400497                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1   | 5/8-24                 | 10-821681-38            |
| O-540-E4C5                    | -     | 10-400495                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1   | 3/4-20                 | 10-821684-38            |
| O-540-E4C5                    | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-8   | 5/8-24                 | 10-821681-38            |
| O-540-E4C5                    | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-8   | 3/4-20                 | 10-821684-38            |
| O-540-E4C5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821601-38            |
| O-540-E4C5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821604-38            |
| O-540-F1A5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 5/8-24                 | 10-821671-2             |
| O-540-F1A5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 3/4-20                 | 10-821674-2             |
| O-540-F1B5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 5/8-24                 | 10-821671-2             |
| O-540-F1B5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 3/4-20                 | 10-821674-2             |
| O-540-F1B5                    | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204T    | 10-600646-201 | 5/8-24                 | 10-821671-2             |
| O-540-F1B5                    | -     | -                             | S6LSC-200    | 10-600616-3  | S6LSC-204T    | 10-600646-201 | 3/4-20                 | 10-821674-2             |
| O-540-F1B5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821601-2             |
| O-540-F1B5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821604-2             |
| O-540-G1A5                    | -     | 10-400497                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1   | 5/8-24                 | 10-821681-38            |
| O-540-G1A5                    | -     | 10-400495                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1   | 3/4-20                 | 10-821684-38            |
| O-540-G1A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821604-38            |
| O-540-G1A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821601-38            |
| O-540-G2A5                    | -     | 10-400497                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1   | 5/8-24                 | 10-821681-38            |
| O-540-G2A5                    | -     | 10-400495                     | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-1   | 3/4-20                 | 10-821684-38            |
| O-540-G2A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821604-38            |
| O-540-G2A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821601-38            |
| O-540-H1A5                    | -     | -                             | S6LSC-21     | 10-500516-2  | S6LSC-21      | 10-500516-2   | 5/8-24                 | 10-821671-2             |
| O-540-H1A5                    | -     | -                             | S6LSC-21     | 10-500516-2  | S6LSC-21      | 10-500516-2   | 3/4-20                 | 10-821674-2             |
| O-540-H1B5D                   | -     | 10-785146-106                 | D6LN-3200    | 10-682610-11 | DUAL MAGNETO  |               | 3/4-20                 | 10-821624-6             |
| O-540-H2A5                    | -     | 10-400474                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 5/8-24                 | 10-821671-2             |
| O-540-H2A5                    | -     | 10-400468                     | S6LSC-21     | 10-500516-2  | S6LSC-204     | 10-600646-1   | 3/4-20                 | 10-821674-2             |
| O-540-H2A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 5/8-24                 | 10-821601-2             |
| O-540-H2A5                    | 2     | -                             | 6300         | -            | 6300          | -             | 3/4-20                 | 10-821604-2             |
| O-540-H2B5D                   | -     | 10-785146-106                 | D6LN-3200    | 10-682610-11 | DUAL MAGNETO  |               | 3/4-20                 | 10-821624-6             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNESS |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|----------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| O-540-J1A5D                   | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| O-540-J1B5D                   | -     | 10-785146-106                 | D6LN-3200    | 10-682610-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821624-6             |
| O-540-J1C5D                   | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| O-540-J2A5D                   | -     | 10-785126-112                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-36            |
| O-540-J2B5D                   | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| O-540-J2B5D                   | -     | 10-785126-112                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-36            |
| O-540-J2C5D                   | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| O-540-J3A5D                   | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| O-540-J3A5D                   | -     | 10-785126-112                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-36            |
| O-540-J3C5D                   | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| O-540-L3C5D                   | -     | 10-785126-105                 | D6LN-3000    | 10-682560-11 | DUAL MAGNETO  |             | 3/4-20               | 10-821614-6             |
| TIO-540-A1A                   | -     | -                             | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821685-12            |
| TIO-540-A1B                   | -     | -                             | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821685-12            |
| TIO-540-A1C                   | -     | -                             | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821685-12            |
| TIO-540-A2A                   | -     | -                             | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821685-12            |
| TIO-540-A2B                   | -     | -                             | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821685-12            |
| TIO-540-A2C                   | -     | -                             | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821685-12            |
| TIO-540-C1A                   | -     | 10-400445                     | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-38            |
| TIO-540-C1A                   | -     | 10-400446                     | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-38            |
| TIO-540-E1A                   | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-8 | 5/8-24               | 10-821681-40            |
| TIO-540-E1A                   | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-8 | 3/4-20               | 10-821684-40            |
| TIO-540-F2BD                  | -     | 10-785046-109                 | D6LN-3200    | 10-682910-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821625-4             |
| TIO-540-G1A                   | -     | 10-400496                     | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 5/8-24               | 10-821681-40            |
| TIO-540-G1A                   | -     | 10-400498                     | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821684-40            |
| TIO-540-H1A                   | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-8 | 5/8-24               | 10-821681-40            |
| TIO-540-H1A                   | 3     | -                             | S6LN-1227    | 10-349370-4  | S6LN-1209     | 10-349310-8 | 3/4-20               | 10-821684-40            |
| TIO-540-J2B                   | -     | -                             | S6LN-1208    | 10-349290-1  | S6LN-1209     | 10-349310-1 | 3/4-20               | 10-821685-12            |
| TIO-540-J2BD                  | -     | 10-785046-109                 | D6LN-3200    | 10-682910-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821625-4             |
| TIO-540-K1AD                  | -     | 10-785146-111                 | D6LN-3200    | 10-682610-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821624-6             |
| TIO-540-N2BD                  | -     | 10-785046-109                 | D6LN-3200    | 10-682910-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821625-4             |
| TIO-540-R2AD                  | -     | 10-785046-109                 | D6LN-3200    | 10-682910-13 | DUAL MAGNETO  |             | 3/4-20               | 10-821625-4             |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |               | RIGHT MAGNETO |               | GOLD SEAL<br>HARNESSES |                         |
|-------------------------------|-------|-------------------------------|--------------|---------------|---------------|---------------|------------------------|-------------------------|
|                               |       |                               | Type         | Part No       | Type          | Part No       | Spark<br>Plug          | Complete<br>Harness P/N |
| TIO-540-S1AD                  | -     | 10-785126-111                 | D6LN-3000    | 10-682560-13  | DUAL MAGNETO  |               | 3/4-20                 | 10-821615-20            |
| TIO-540-U2A                   | 29    | 10-349610-2                   | S6LN-1258    | 10-349490-2   | S6LN-1259     | 10-349510-2   | 3/4-20                 | 10-821695-40            |
| TIO-540-U2A                   | 2     | -                             | 6300         | -             | 6300          | -             | 5/8-24                 | 10-821601-40            |
| TIO-540-V2AD                  | -     | 10-782046-118                 | D6LN-3200    | 10-682910-13  | DUAL MAGNETO  |               | 3/4-20                 | 10-821625-34            |
| TIO-540-W2A                   | -     | -                             | S6LN-1208    | 10-349290-1   | S6LN-1209     | 10-349310-1   | 3/4-20                 | 10-821684-2             |
| TIO-540-W2A                   | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-821604-2             |
| TIO-540-AA1AD                 | -     | 10-785146-111                 | D6LN-3200    | 10-682610-13  | DUAL MAGNETO  |               | 3/4-20                 | 10-821624-6             |
| TIO-540-AB1AD                 | -     | 10-785126-107                 | D6LN-3000    | 10-682560-13  | DUAL MAGNETO  |               | 3/4-20                 | 10-821614-6             |
| TIO-540-AE2A                  | -     | -                             | S6LSC-200P   | 10-600616-101 | S6LSC-204P    | 10-600646-101 | 3/4-20                 | 10-821674-2             |
| TIO-540-AE2A                  | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-821604-2             |
| TIO-540-AF1A                  | 2     | -                             | 6300         | -             | 6300          | -             | 3/4-20                 | 10-821604-2             |
| TIVO-540-A2A                  | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| TIVO-540-A2A                  | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-A1A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-A1A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-A2A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-A2A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B1A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1B                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B1B                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1B3                   | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B1B3                   | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1C                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B1C                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1D                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B1D                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1E                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B1E                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1F                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B1F                    | -     | -                             | S6RSC-200    | 10-600616-7   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B1H3                   | -     | -                             | S6RN-1208    | 10-349290-3   | S6LN-1209     | 10-349310-10  | 3/4-20                 | 10-821685-18            |
| VO-540-B2A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B2A                    | -     | -                             | S6RSC-21     | 10-500516-5   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |
| VO-540-B2C                    | -     | -                             | S6RSC-200    | 10-600616-4   | S6LSC-204     | 10-600646-2   | 5/8-24                 | 10-821672-18            |
| VO-540-B2C                    | -     | -                             | S6RSC-200    | 10-600616-4   | S6LSC-204     | 10-600646-2   | 3/4-20                 | 10-821675-18            |

| ENGINE<br>Textron<br>Lycoming             | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |              | GOLD SEAL<br>HARNESSES |                     |     |
|---|-------|-------------------------------|--------------|--------------|---------------|--------------|------------------------|---------------------|-----|
|   |       |                               | Type         | Part No      | Type          | Part No      | Spark<br>Plug          | Complete<br>Harness | P/N |
| VO-540-B2D                                | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18        |     |
| VO-540-B2D                                | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18        |     |
| VO-540-B2E                                | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18        |     |
| VO-540-B2E                                | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18        |     |
| VO-540-B2G                                | -     | -                             | S6RN-1208    | 10-349290-3  | S6LN-1209     | 10-349310-10 | 3/4-20                 | 10-821685-18        |     |
| VO-540-C1A                                | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18        |     |
| VO-540-C1A                                | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18        |     |
| VO-540-C1B                                | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18        |     |
| VO-540-C1B                                | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18        |     |
| VO-540-C1C3                               | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18        |     |
| VO-540-C1C3                               | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18        |     |
| VO-540-C2A                                | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18        |     |
| VO-540-C2A                                | -     | -                             | S6RSC-200    | 10-600616-7  | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18        |     |
| VO-540-C2B                                | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2  | 5/8-24                 | 10-821672-18        |     |
| VO-540-C2B                                | -     | -                             | S6RSC-21     | 10-500516-5  | S6LSC-204     | 10-600646-2  | 3/4-20                 | 10-821675-18        |     |
| VO-540-C2C                                | -     | -                             | S6RN-1208    | 10-349290-4  | S6LN-1209     | 10-349310-10 | 3/4-20                 | 10-821685-18        |     |
| TIGO-541-B1A                              | -     | -                             | S6LN-1208    | 10-349290-2  | S6RN-1209     | 10-349310-4  | 3/4-20                 | 10-821685-14        |     |
| TIGO-541-D1A                              | -     | -                             | S6LN-1208    | 10-349290-2  | S6RN-1209     | 10-349310-4  | 3/4-20                 | 10-821685-14        |     |
| TIGO-541-D1B                              | -     | -                             | S6LN-1208    | 10-349290-2  | S6RN-1209     | 10-349310-4  | 3/4-20                 | 10-821685-14        |     |
| TIGO-541-E1A                              | -     | -                             | S6LN-1208    | 10-349290-2  | S6RN-1209     | 10-349310-4  | 3/4-20                 | 10-821685-14        |     |
| TIGO-541-E1A                              | 29    | 10-349610-1                   | S6LN-1258    | 10-349490-1  | S6RN-1259     | 10-349510-1  | 3/4-20                 | 10-821695-14        |     |
| TIO-541-A1A,<br>E1A4, E1B4,<br>E1C4, E1D4 | -     | -                             | S6LN-1208    | 10-349290-2  | S6RN-1209     | 10-349310-4  | 3/4-20                 | 10-821685-8         |     |
| BIO-720-A1A                               | -     | 10-400494                     | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4  | 3/4-20                 | 10-821885-4         |     |
| IO-720-A1A                                | 26    | 10-400494                     | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4  | 3/4-20                 | 10-821885-4         |     |
| IO-720-A1B                                | -     | 10-400494                     | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4  | 3/4-20                 | 10-821885-4         |     |
| IO-720-A1BD                               | -     | 10-785148-102                 | D8LN-3200    | 10-682620-11 | DUAL MAGNETO  |              | 3/4-20                 | 10-821825-2         |     |
| IO-720-B1A                                | 27    | 10-400494                     | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4  | 3/4-20                 | 10-821885-4         |     |
| IO-720-B1B                                | -     | 10-400494                     | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4  | 3/4-20                 | 10-821885-4         |     |
| IO-720-B1B                                | 29    | 10-349620-1                   | S8LN-1258    | 10-349500-1  | S8LN-1259     | 10-349520-1  | 3/4-20                 | 10-821895-4         |     |
| IO-720-B1BD                               | -     | 10-785148-102                 | D8LN-3200    | 10-682620-11 | DUAL MAGNETO  |              | 3/4-20                 | 10-821825-2         |     |
| IO-720-B1BD                               | -     | 10-785048-101                 | D8LN-3200    | 10-682920-11 | DUAL MAGNETO  |              | 3/4-20                 | 10-821825-2         |     |
| IO-720-C1B                                | -     | 10-400494                     | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4  | 3/4-20                 | 10-821885-4         |     |
| IO-720-C1B                                | 3     | -                             | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-5  | 3/4-20                 | 10-821885-4         |     |

| ENGINE<br>Textron<br>Lycoming | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO |             | GOLD SEAL<br>HARNES |                         |
|-------------------------------|-------|-------------------------------|--------------|--------------|---------------|-------------|---------------------|-------------------------|
|                               |       |                               | Type         | Part No      | Type          | Part No     | Spark<br>Plug       | Complete<br>Harness P/N |
| IO-720-C1BD                   | -     | 10-785148-102                 | D8LN-3200    | 10-682620-11 | DUAL MAGNETO  |             | 3/4-20              | 10-821825-2             |
| IO-720-D1B                    | -     | -                             | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4 | 3/4-20              | 10-821885-6             |
| IO-720-D1BD                   | -     | 10-785148-102                 | D8LN-3200    | 10-682620-11 | DUAL MAGNETO  |             | 3/4-20              | 10-821825-2             |
| IO-720-D1C                    | -     | -                             | S8LN-1208    | 10-349300-4  | S8LN-1209     | 10-349320-4 | 3/4-20              | 10-821885-6             |
| IO-720-D1CD                   | -     | 10-785148-102                 | D8LN-3200    | 10-682620-11 | DUAL MAGNETO  |             | 3/4-20              | 10-821825-2             |



| ENGINE<br>PZL<br>Franklin                   | Notes | IGNITION<br>SYSTEM<br>Kit P/N | LEFT MAGNETO |              | RIGHT MAGNETO  |             | GOLD SEAL<br>HARNESS |                         |
|---|-------|-------------------------------|--------------|--------------|----------------|-------------|----------------------|-------------------------|
|   |       |                               | Type         | Part No      | Type           | Part No     | Spark<br>Plug        | Complete<br>Harness P/N |
| 6A4-150-B3, B31,<br>B4                      | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 5/8-24               | 10-821671-92            |
| 6A4-150-B3, B31,<br>B4                      | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 3/4-20               | 10-821674-92            |
| 6A4-165-B3, B4,<br>B6                       | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 5/8-24               | 10-821671-92            |
| 6V4-165-B3, B4,<br>B6                       | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 3/4-20               | 10-821674-92            |
| 6V4-178-B3, B32,<br>B33                     | 25    | -                             | S6RSC-21     | 10-500516-9  | S6RSC-21       | 10-500516-9 | -                    | -                       |
| 6V4-200-32, 33                              | -     | -                             | S6RSC-21     | 10-500516-9  | S6RSC-21       | 10-500516-9 | 5/8-24               | 10-821671-92            |
| 6V4-200-32, 33                              | -     | -                             | S6RSC-21     | 10-500516-9  | S6RSC-21       | 10-500516-9 | 3/4-20               | 10-821674-92            |
| 4A-235-B, B3                                | 25    | -                             | S4RSC-21     | 10-500514-5  | S4RSC-204      | 10-600644-5 | -                    | -                       |
| 6A-335-A, B, B1,<br>B1A                     | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 5/8-24               | 10-821671-92            |
| 6A-335-A, B, B1,<br>B1A                     | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 3/4-20               | 10-821674-92            |
| 6AS-335-A, B                                | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 5/8-24               | 10-821671-92            |
| 6AS-335-A, B                                | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 3/4-20               | 10-821674-92            |
| 6V-335-A1A, A1B                             | -     | -                             | S6RSC-21     | 10-500516-9  | S6RSC-21       | 10-500516-9 | 5/8-24               | 10-821671-92            |
| 6V-335-A1A, A1B                             | -     | -                             | S6RSC-21     | 10-500516-9  | S6RSC-21       | 10-500516-9 | 3/4-20               | 10-821674-92            |
| 6VS-335-A, A1, B,<br>B1                     | -     | -                             | S6RSC-21     | 10-500516-9  | S6RSC-21       | 10-500516-9 | 5/8-24               | 10-821671-92            |
| 6VS-335-A, A1, B,<br>B1                     | -     | -                             | S6RSC-21     | 10-500516-9  | S6RSC-21       | 10-500516-9 | 3/4-20               | 10-821674-92            |
| 6A-350-C1, C1A,<br>C2, C2A, D1,<br>D1A, D1B | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 5/8-24               | 10-821671-92            |
| 6A-350-C1, C1A,<br>C2, C2A, D1,<br>D1A, D1B | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 3/4-20               | 10-821674-92            |
| 6V-350-A, B                                 | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 5/8-24               | 10-821671-92            |
| 6V-350-A, B                                 | -     | -                             | S6RSC-21     | 10-500516-7  | S6RSC-21       | 10-500516-7 | 3/4-20               | 10-821674-92            |
| <b>Revmaster/<br/>Volkswagen</b>            |       |                               |              |              |                |             |                      |                         |
| R-2100-D                                    | -     | 10-785125-704                 | D4RN-3000    | 10-682555-12 | DUAL MAGNETO   |             | 5/8-24               | 10-821412-93            |
| <b>GROB</b>                                 |       |                               |              |              |                |             |                      |                         |
| G-2500                                      | -     | -                             | S4RSC-21     | 10-500514-3  | SINGLE MAGNETO |             | 5/8-24               | 10-820471-91            |

*Intentionally Left Blank*





**Continental Motors, Inc.**  
**[www.continentalmotors.aero](http://www.continentalmotors.aero)**