


Transponder

KING**KT 76A/ 76C/ 78A**

Connector

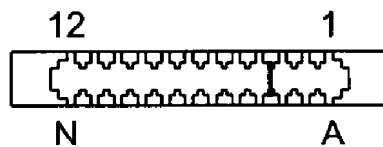

Circuit	Pin #	Notes
13.75 VOLTS	11	Note 1
A1	M	
A2	K	
A4	J	
B1	E	
B2	C	
B4	B	
C1	D	
C2	L	
C4	H	
D4	8	
DIMMER	2	Note 2
DIMMER	3	Note 2
DME SUPPRESSION.....	9	
EXT IDENT	F	
EXT STBY	10	Note 3
GROUND	1	
GROUND	A	
POWER INPUT.....	12	Note 1

(Continued)

For familiarization only. Consult the manufacturers current data.

(KT76A/ 76C/ 78A Continued)

Notes

1. KT76C power in 11 and 12, 11- 33 VDC. KT76A/ 78A, 14 volts in 11, 12 open, for 28 volts, dropping resistor required.
2. For 14 volts, 2 to Dimmer, 3 to ground. For 28 volts, 3 to Dimmer, 2 open.
3. KT76A/ 78A/ MOD 5, KT76A SN 35,900 and up, all KT76C units, ground 10 for standby mode.

For familiarization only. Consult the manufacturers current data.