HMG Fuseholder Bussmann®

Automotive Bolt-In Fuseholder for the AMG Fuse



SPECIFICATIONS

Electrical: Use with AMG Fuses from 100 to 300 Amps.

Body: Black 94VO Thermoplastic

Cover With Tether: Black 94VO Thermoplastic

Recommended Wire Size: #2-8 Ambient Temperature: -40°C to 125°C.

Recommended Torque: 17n.m


Fuse Mounting: M8 or 5/16-18 Threaded Studs

and Hex Nuts.

Cable Positions: 6 total - location optional -Consult factory.

Holder Mounting Dimensions: See Below.

- Side Stackable Feature.
- Bottom Side Insulated From Mounting Panel.
- Splash Resistant Cover.

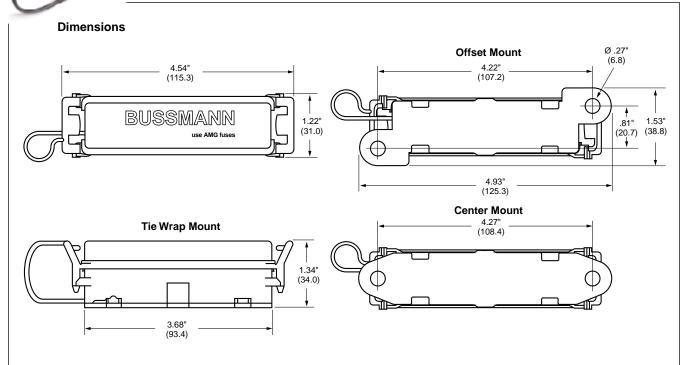

PART NUMBERING SYSTEM











Base

- 1 Tie wrap mount
- 2 Offset mounted
- 3 Center mounted

Hardware



- 1 5/16-18 Studs w/nuts installed
- 2 5/16-18 Studs w/nuts bulk
- 3 5/16-18 Studs w/o nuts
- 4 M8 x 1.25 studs w/nuts installed
- 5 M8 x 1.25 studs w/nuts bulk
- 6 M8 x 1.25 studs w/o nuts

Options



0 - No cover

Style

- 1 Cover installed
- 2 Cover bulk

Consult factory for Bus Bar options and sealed versions

Phone: 1-800-323-1226