



1/4" x 1-1/4" Fuses AGC Series, Fast Acting, Glass Tube

Description

- Fast-acting, glass tube
- Optional leaded version available
- 1/4 x 1-1/4 (6.3mm x 32mm) physical size
- Glass tube, nickel-plated brass endcap construction
- UL Listed product meets standard 248-14

ELECTRICAL CHARACTERISTICS				
% of Amp Rating	Opening Time			
100%	None			
135%	60 Minutes Maximum			
200%	120 Seconds Maximum			

Agency Information

- UL Listed Card: AGC 1/500-10
- UL Recognition Card: AGC 11-30
- CSA Component Acceptance Card (Class No. 1422 30)
- CSA Certification Card (Class No. 1422 01)


Environmental Data

- Shock: 1/100A thru 3/4A MIL-STD-202, Method 213, Test Condition I; 1A thru 30A – MIL-STD-202, Method 207, (HI Shock)
- Vibration: 1/100A thru 30A MIL-STD-202, Method 204, Test Condition A (Except 5g, 500HZ)

Ordering

· Specify product code and packaging code



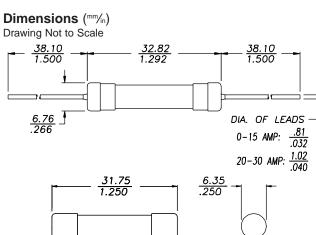

SPECIFICATIONS								
	Voltage	AC Interrupting Rating			Typical DC Cold Resistance**	Typical Melting I²t†	Typical Voltage	
Product Code	Rating							
	AC	250V	125V	32V	(ohms)	AC	Drop‡	
AGC-1/20	250V	35A	10000A	1000A	4.500	0.00773	0.67	
AGC-1/16	250V	35A	10000A	1000A	29.000	0.000181	10.41	
AGC-1/10	250V	35A	10000A	1000A	12.565	0.000787	6.00	
AGC-1/8	250V	35A	10000A	1000A	6.800	0.00131	4.67	
AGC-3/16	250V	35A	10000A	1000A	4.900	0.00637	4.12	
AGC-2/10	250V	35A	10000A	1000A	3.360	0.00435	4.51	
AGC-1/4	250V	35A	10000A	1000A	1.860	0.0148	0.89	
AGC-3/10	250V	35A	10000A	1000A	1.670	0.0208	2.88	
AGC-3/8	250V	35A	10000A	1000A	1.203	0.0321	4.59	
AGC-1/2	250V	35A	10000A	1000A	0.615	0.269	0.59	
AGC-3/4	250V	35A	10000A	1000A	0.312	0.815	0.37	
AGC-1	250V	35A	10000A	1000A	0.190	1.615	0.31	
AGC-1-1/4	250V	100A	10000A	1000A	0.145	0.018	0.35	
AGC-1-1/2	250V	100A	10000A	1000A	0.115	0.0149	0.27	
AGC-2	250V	100A	10000A	1000A	0.078	0.00509	0.28	
AGC-2-1/4	250V	100A	10000A	1000A	0.067	0.00588	0.26	
AGC-2-1/2	250V	100A	10000A	1000A	0.057	0.00879	0.31	
AGC-3	250V	100A	10000A	1000A	0.045	0.0167	0.25	
AGC-4	250V	200A	10000A	1000A	0.030	0.0305	0.22	
AGC-5	250V	200A	10000A	1000A	0.024	0.045	0.23	
AGC-6	250V	200A	10000A	1000A	0.020	0.071	0.23	
AGC-7	250V	200A	10000A	1000A	0.017	0.105	0.23	
AGC-8	250V	200A	10000A	1000A	0.014	0.152	0.19	
AGC-9	250V	200A	10000A	1000A	0.012	0.21	0.18	
AGC-10	250V	200A	10000A	1000A	0.008	0.492	0.20	
AGC-15	32V	-	-	1000A	0.006	0.566	0.14	
AGC-20	32V	-	-	1000A	0.004	1.438	0.12	
AGC-25	32V	-	-	1000A	0.003	2.109	0.11	
AGC-30	32V	-	-	1000A	0.002	3.807	0.12	

^{*} DC Cold Resistance (Measured at ≤10% of rated current)

[†] Typical Melting I²t (A²Sec) (I²t was measured at listed interrupting rating and rated voltage.)

[‡] Typical Voltage Drop (Voltage drop was measured at 25°C ambient temperature at rated current)






1/4" x 1-1/4" Fuses AGC Series, Fast Acting, Glass Tube


TIME CURRENT CURVE

CURRENT IN AMPERES

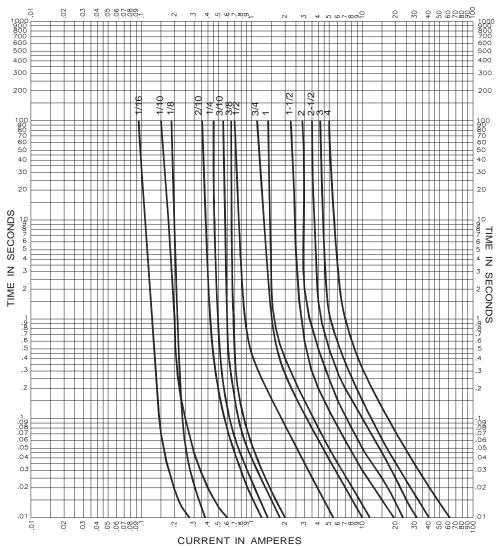

OPTION CODE			
Option Code	Description		
В	Board Washable - Hermetically sealed to withstand aqueous cleaning		
V	Axial leads - brass overcaps with copper and nickel flash, plated in tin lead		

PACKAGING CODE				
Packaging Code	Description			
BK	100 pieces of fuses packed into a cardboard carton with flaps folded			
BK1	1,000 pieces of fuses packed into a cardboard carton with flaps folded			
BK8	8,000 pieces of fuses packed into a cardboard carton with flaps folded			



OC-2543 5/02

Visit us on the Web at www.cooperET.com

© Cooper Electronic Technologies 2002 3601 Quantum Boulevard Boynton Beach, Florida 33426-8638 Tel: +1-561-752-5000 Toll Free: +1-888-414-2645 Fax: +1-561-742-1178

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.